
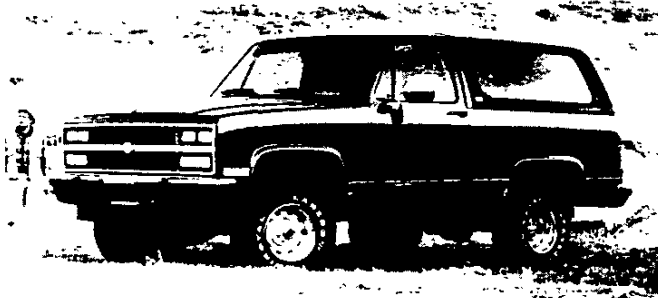


# V BLAZER/JIMMY

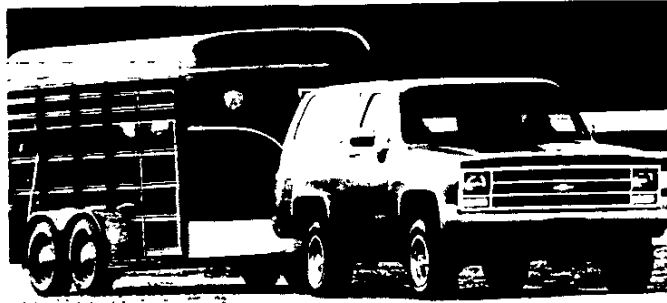

## CONTENTS


	<u>Page</u>
MODELS	2
SCOTTSDALE/SLX TRIM	3
SILVERADO/SLE (RPO YE9) TRIM	4
POWERTRAINS	5
STANDARD SUSPENSION	8
OPTIONAL SUSPENSION	9
WHEELS AND TIRES	10
FRAME/STEERING/BRAKES	11
ELECTRICAL	12
COOLING	13
DIMENSIONS	14
OPTIONS	15
COLOR COMBINATIONS	17
EXTERIOR COLORS	B
INTERIOR TRIM	C
SEATS	D
TRAILERING	E

V BLAZER/JIMMY

KEY:

Bold Print Indicates Not Available W/ High Altitude Emissions

**FOUR-WHEEL DRIVE (V)**

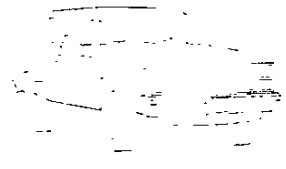V BLAZER/JIMMY	WB (IN.)	GVWR (LBS.)	MAX. PAYLOAD (LBS.)	PASS. CAP.	STD. ENGINE/TRANS	OPT. ENGINE/TRANS	MODEL NUMBER
	106.5	6100	1260	2/5		5.7L V8/A4	V10516/ZW9

**V BLAZER/JIMMY**

The V Blazer/Jimmy offers the rugged versatility of four-wheel drive with a choice of a gasoline or diesel engine (6.2L V8 Diesel not available in California).

Based on model weight. Total available for equipment and cargo.

**V BLAZER/JIMMY TRIM LEVELS**

**SCOTTSDALE/SLX**

The Scottsdale/SLX trim level is the standard V Blazer/Jimmy trim. It emphasizes substantial value in a standard trim.


**SILVERADO/SLE (RPO YE9)**

The Silverado/SLE trim level is the top-of-the-line V Blazer/Jimmy trim level. It offers buyers maximum comfort and convenience in a full-size sport/utility vehicle.

**V BLAZER/JIMMY SEATING**


**STANDARD: HIGH-BACK BUCKET SEATS**

(Driver and Passenger). (\*\*4)

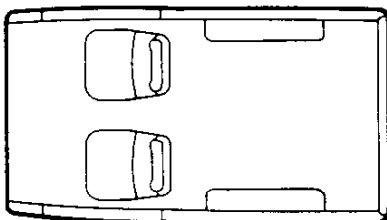


**OPTIONAL: RECLINING HIGH-BACK BUCKET SEATS**

(Driver and Passenger). (\*\*6)

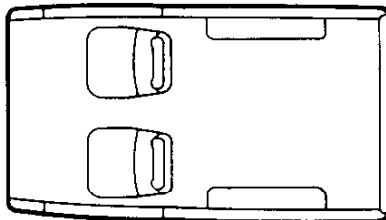

**OPTIONAL: FOLDING REAR BENCH SEAT (RPO AM7)**

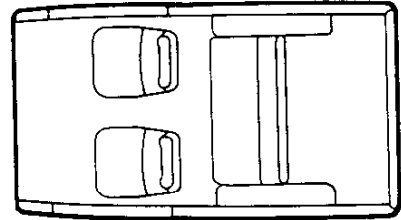

## SCOTTSDALE/SLX

The Scottsdale/SLX trim level is the standard trim level of the V Blazer/Jimmy series. It is designed to offer buyers a high level of standard features when purchasing a standard-level vehicle.

*The following features are standard:*



Some equipment shown may be optional or extra cost.

### POWERTRAIN/CHASSIS

- 5.7-liter V8 engine with Electronic Fuel Injection (EFI) is standard. It produces 210 horsepower @ 4000 rpm and 300 lb. ft. of net torque @ 2800 rpm.
- 6.2-liter V8 diesel engine with Mechanical Fuel Injection is available with B3J diesel equipment (see Powertrains for details).
- Dual electric high-note and low-note horns.
- Floor-mounted 4-speed manual transmission (4-speed automatic overdrive is standard with California emissions).
- Front suspension is a leaf spring design.
- Front stabilizer bar.
- Rear suspension is a multi-stage leaf spring design.
- Power front disc/rear drum brakes.
- Rear-wheel anti-lock braking system.
- Power steering.
- Heavy-duty battery with 630 CCA is standard on all gasoline engine models.
- Two 540 CCA batteries are standard on all diesel engine models.
- Standard alternator with a maximum capacity of 85 amps (gasoline engine), or 66 amps (diesel engine).
- Frame is an all-welded ladder-type with channel design and boxed front-end section.
- Fully synchronized 2-speed transfer case and manually-locking hubs.
- 31-gallon (approx.) fuel tank capacity.

### EXTERIOR

- Front and rear chromed bumpers.
- Scottsdale/SLX nameplates.
- Molded plastic grille and front lamp bezels painted light and dark argent.
- Bright metal hub caps with black trim.
- Argent painted 15" x 6.00" wheels.
- Four all-season steel-belted radial tires (see Wheels and Tires for size and type).
- Tools include mechanical jack and wheel wrench.
- Intermittent windshield wiper system.
- RH and LH below-eye-line type mirrors painted black. Mirror-head size is 6.5" x 9.0".
- Double wall constructed tailgate with power-operated tailgate window.
- Front tow hooks.


### INTERIOR

- RH and LH padded armrests integral with door panels.
- High-back front bucket seats with Custom Vinyl pigskin-grained trim. Passenger seat has a front sliding mechanism for easy rear entry.
- Two coat hooks on LH side.
- Full-length bright sill plates at front doors and at front and rear of rear compartment floor.
- Map light.
- Two dome lamps with door-operated switches.
- Floor covering consists of embossed black rubber mats in front and rear.
- Insulation on dash panel, on floor panel and between double-wall cab roof. Extra insulation is provided for diesel engine models.
- Tinted glass on all windows.
- Padded, color-keyed RH and LH sunshades.
- Gages include speedometer, odometer with trip odometer, fuel, voltmeter, oil pressure and engine pressure.
- Heavy-duty heater and defogger.
- AM radio with fixed mast antenna.
- 2-spoke steering wheel and anti-theft locking feature on steering column.
- 10-inch rearview mirror.
- Color-keyed, molded plastic door trim panels.
- Cigarette lighter with ash tray illumination.
- Full-size spare tire and wheel.
- Spare tire carrier on RH rear panel.
- Headlamp warning buzzer.

## SILVERADO/SLE (RPO YE9)

The Silverado/SLE trim level is an optional trim level for the V Blazer/Jimmy series. It is designed to offer buyers an increased level of comfort and convenience features compared to the standard Scottsdale/SLX trim level:

*The following features are standard. Bold type denotes equipment in addition to or replacing that of the Scottsdale/SLX trim level:*

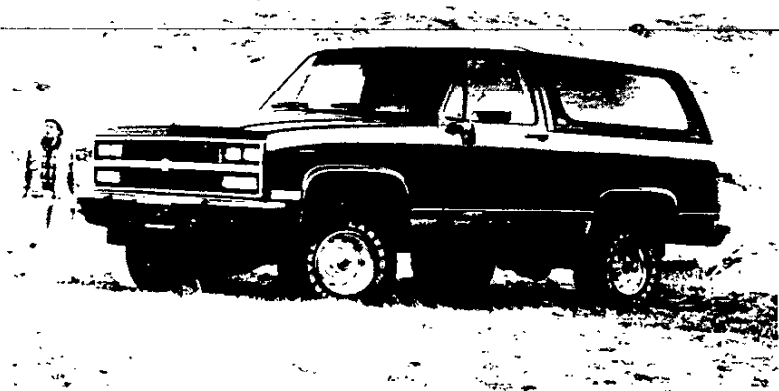

Some equipment shown may be optional or extra cost.

### POWERTRAIN/CHASSIS

- 5.7-liter V8 engine with Electronic Fuel Injection (EFI) is standard. It produces 210 horsepower @ 4000 rpm and 300 lb. ft. of net torque @ 2800 rpm.
- 6.2-liter V8 diesel engine with Mechanical Fuel Injection is available with B3J diesel equipment (see Powertrains for details).
- Dual electric high-note and low-note horns.
- Floor-mounted 4-speed manual transmission (4-speed automatic overdrive is standard with California emissions).
- Front suspension is a leaf spring design.
- Front stabilizer bar.
- Rear suspension is a multi-stage leaf spring design.
- Power front disc/rear drum brakes.
- Rear-Wheel Anti-lock Braking System.
- Power steering.
- Heavy-duty battery with 630 CCA is standard on all gasoline engine models.
- Two 540 CCA batteries are standard on all diesel engine models.
- Standard alternator with a maximum capacity of 85 amps (gasoline engine), or 66 amps (diesel engine).
- Frame is an all-welded ladder-type with channel design and boxed front-end section.
- Fully synchronized 2-speed transfer case and manually-locking hubs.
- 31-gallon (approx.) fuel tank capacity.

### EXTERIOR


- Front and rear chromed bumpers with bumper guards and black rub strips (front rub strip has bright trim).
- Silverado/SLE nameplates.
- Molded plastic grille and front lamp bezels painted dark argent with chrome trim (GMC grille and front lamp bezels are chromed with dark argent paint trim).
- RH and LH rectangular dual halogen headlamps.
- Body side and rear black moldings with bright trim.
- Bright wheel opening moldings.
- Bright metal wheel covers.
- Argent painted 15" x 6.00" wheels.
- Four all-season steel-belted radial tires (see Wheels and Tires for details.)
- Tools include mechanical jack and wheel wrench.
- Intermittent windshield wiper system.
- Bright front side marker lamp and taillamp trim.
- RH and LH below-eye-line type mirrors painted black. Mirror-head size is 6.5" x 9.0".
- Cab-to-fender and hood insulators.
- Double wall constructed tailgate with power operated tailgate window and bright applique.
- Underhood reel-type lamp.
- Front tow hooks.

### INTERIOR


- RH and LH padded armrests integral with door panels.
- High-back reclining front bucket seats with choice of Custom Vinyl pigskin-grained trim or textured velour Custom Cloth trim. Passenger seat has a front sliding mechanism for easy rear entry.
- Two coat hooks on LH side.
- RH front and LH/RH rear assist straps.
- Full-length bright sill plates at front doors and front and rear of rear compartment floor.
- Map light and glove box light.
- Two dome lamps with door-operated switches.
- Auxiliary lighting.
- Floor covering consists of color-keyed front compartment carpeting (matching rear compartment floor covering, including wheel-housings, is also provided with optional rear seat).
- Removable, color-keyed front and rear floor mats.
- Insulation on dash panel, between double-wall cab roof, on floor panel (extra-thick at front; extra-thick at rear provided with available rear seat), under cowl panel, on headliner and on body side trim panels. Extra insulation is provided for diesel engine models.
- Tinted glass on all windows.
- Padded, color-keyed RH and LH sunshades with flexible outboard ends and sliding extenders at inboard ends. LH sunshade has storage strap. RH sunshade has illuminated mirror.
- Gages include speedometer, odometer with trip odometer, fuel, voltmeter, oil pressure and engine pressure.
- Heavy-duty heater and defogger.
- Chevrolet models feature an AM radio with fixed mast antenna.
- GMC models feature an electronically tuned AM/FM stereo radio with seek-scan and digital clock with fixed mast antenna.
- Brushed, pewter-toned instrument panel trim.
- 4-spoke sport steering wheel with simulated stitched leather appearance and anti-theft locking feature on steering column.
- 10-inch rearview mirror.
- Front compartment foam-backed cloth headliner with matching retainer moldings.
- Special door trim panels, including door closing assist strips, decorative inserts, map pockets and carpet trim.
- Rear sidewall trim panels with ashtrays and carpet trim.
- Cigarette lighter with ashtray illumination.
- Full-size spare tire and wheel.
- Spare tire carrier on RH rear panel with black vinyl spare tire cover.
- Headlamp warning buzzer.
- Color-keyed molded plastic console with storage and beverage pockets.

HORSEPOWER AND TORQUE RATINGS		
ENGINE	5.7L V8	6.2L V8 DIESEL
ORDERING CODE	L05	LH6
SAE NET HORSEPOWER @ RPM	210 @ 4000	145 @ 3600
SAE NET TORQUE LB. FT. @ RPM	300 @ 2800	255 @ 1900
FUEL SYSTEM	EFI	Gear Driven Mechanical Fuel Injection
CLUTCH SIZE	12	—
STD. Battery (Cold Cranking Amps @ 0°F)	630	2 @ 540 Each

**5.7L V8 RPO L05**  
HORSEPOWER: 210 @ 4000 RPM  
TORQUE: 300 @ 2800 RPM

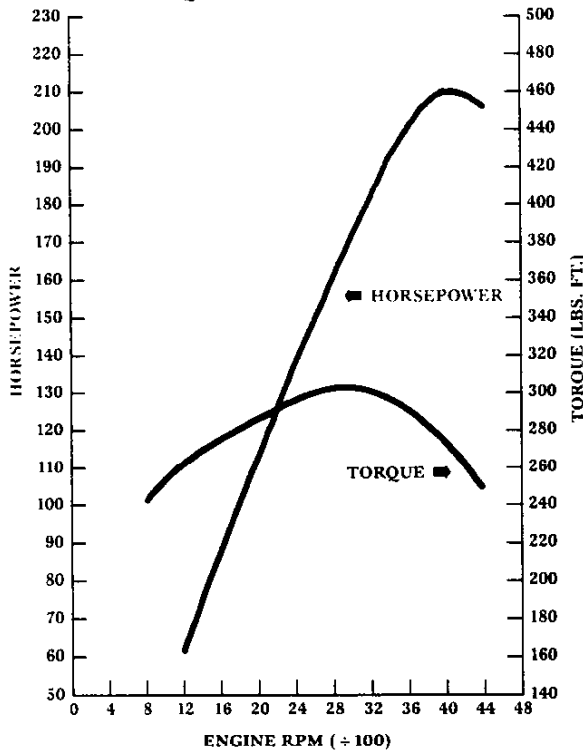

**6.2L V8 DIESEL RPO LH6**  
HORSEPOWER: 145 @ 3600 RPM  
TORQUE: 255 @ 1900 RPM

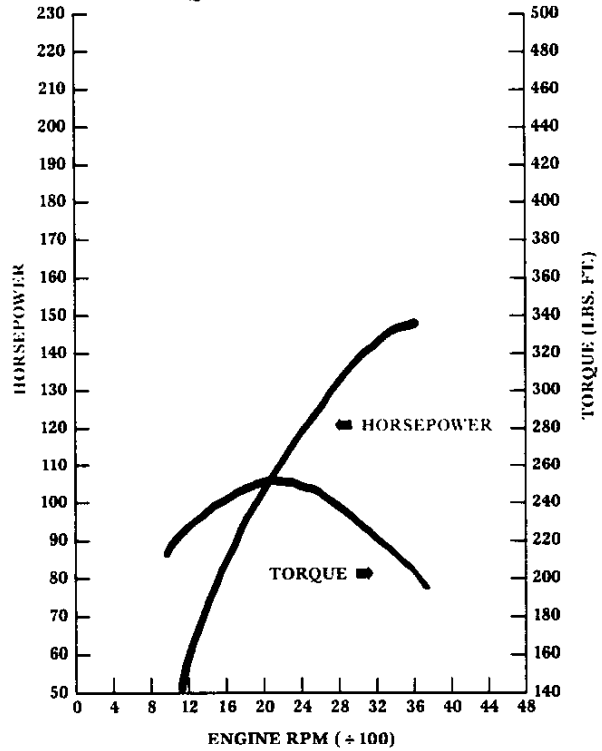

KEY: S Standard O Optional  
—Not Offered

RED Not Available w/California Emissions  
BOLD Not Available w/High Altitude Emissions

H High Altitude Emissions Only  
C California Emissions Only

MODEL	TRANSMISSION				AXLES				GVWR
	(MM4) MAN 4-SPD	(MM5) MAN 5-SPD	(MX1) AUTO 3-SPD	(MX0) AUTO 4-SPD	← ECONOMY →		POWER →		
V BLAZER/JIMMY V10516					2.73	3.08	3.42	3.73	
ENGINE									
5.7L V8 (L05)				O	S	O	O	O <sup>1,2</sup>	6100

<sup>1</sup> Reqs. Z82 Trailering w/o California Emissions; w/California Emissions, Reqs. KC4 Engine Oil Cooler

<sup>2</sup> Reqs. Z82 Trailering Special Or High Altitude Emissions

**TRANSMISSION GEAR RATIOS**

<b>MANUAL</b>	
TRANSMISSION MODEL	MANUAL 4-SPEED SM465
RPO CODE	MM4
SYNCHRONIZED SPEEDS	2/3/4
<b>GEAR RATIOS</b>	
First	6.55
Second	3.58
Third	1.70
Fourth	1.00
Fifth	—
Reverse	6.09
<b>GEAR TYPE</b>	
Forward:	Helical
Reverse:	Spur
Center Distance (mm)	117
<b>POWER TAKE-OFF DATA</b>	
Opening Type:	SAE Std. 6-Bolt
Location:	Both Sides
Drive Gear:	3rd Speed Counter Gear
PTO Gear RPM @ 1000 Engine RPM:	425
PTO Pitch Line Velocity @ 1000: Engine RPM:	560 ft./minute
<b>LUBRICANT CAPACITY (pints)</b>	
Oil	8

<b>AUTOMATIC</b>	
TRANSMISSION MODEL	AUTOMATIC 4-SPEED w/OVERDRIVE 700R4
RPO CODE	MX0
<b>GEAR RATIOS</b>	
First	3.06
Second	1.63
Third	1.00
Fourth	.70
Reverse	2.29
<b>GEAR TYPE</b>	Planetary
<b>TORQUE CONVERTER</b>	
Element Types	Pump/Stator/Turbine
Lock-up Clutch	Automatic
<b>POWER TAKE-OFF DATA</b>	
Opening Type:	—
Location:	—
Drive Gear:	—
PTO Gear RPM @ 1000 Engine RPM:	—
PTO Pitch Line Velocity @ 1000 RPM:	—
<b>LUBRICANT CAPACITY (pints)</b>	
Dry Fill	19
Refill	10

**TRANSFER CASE**

TRANSFER CASE MODEL	NEW PROCESS 241
AVAILABILITY	V10516
<b>RATIOS:</b> Hi Range Lo Range	1.00:1 2.72:1
<b>LEVER POSITIONS</b>	4-Lo (All-wheel Underdrive) N (Neutral) 2-Hi (Rear-wheel Drive) 4-Hi (All-wheel Drive)
<b>LEVER LOCATION</b>	Rear of Transmission at Center of Floor
<b>POWER TAKE-OFF DATA:</b>	
Opening	—
Location	—
<b>OIL CAPACITY (pints)</b>	10

**FRONT AXLES**

<b>FRONT AXLE:</b> Make and Capacity (lbs.)	GM 3600			
<b>PINION &amp; RING GEAR:</b> Type	Hypoid			
Ratio	2.73	3.08	3.42	3.73
Pinion Teeth	15	13	12	11
Ring Gear Teeth	41	40	41	41
Ring Gear Dia. (in.)	8.50	8.50	8.50	8.50
<b>DIFFERENTIAL:</b> Type Bearings, Type	2-Pinion Tapered Roller			
<b>LUBRICANT CAPACITY (Pints)</b>	4.5			

**REAR AXLES**

<b>REAR AXLE:</b> Make and Capacity (lbs.)	GM 3750			
<b>PINION &amp; RING GEAR:</b> Type	Hypoid			
Ratio	2.73	3.08	3.42	3.73
Pinion Teeth	15	13	12	11
Ring Gear Teeth	41	40	41	41
Ring Gear Dia. (in.)	8.5	8.5	8.5	8.5
<b>DIFFERENTIAL:</b> Type Bearings, Type	2-Pinion Tapered Roller			
<b>AXLE SHAFTS:</b> Type  Min. Diameter (in.)	Semi-Floating Integral Shaft and Drive Flange  —			
<b>HOUSING @ SPRING SEAT:</b> Section Diameter and Thickness (in.)	3.0 x .25			

**FOUR-WHEEL-DRIVE (V)**

MODEL	V BLAZER/JIMMY 4X4	
	GAS	DIESEL <sup>2</sup>
MODEL NUMBER	V10516/ZW9	
		B3J
<b>SUSPENSION (STD)</b>		
<b>PAYLOAD</b> (Max. lbs.) <sup>1</sup>	1260	1058
<b>GVWR</b> (lbs.)	6100	6250
<b>GAWR</b> (lbs.): Front Rear	3526 3550	3526 3550
<b>FRONT SUSPENSION:</b> Type Standard Spring Cap. (Tot. lbs.)	Tapered Leaf 3700	Tapered Leaf 3800
Front Shock Absorbers Piston Diameter (mm) STD/OPT	32/Four at 25	32/Four at 25
Front Stabilizer Bar Diameter (in.) STD/OPT	1.25/—	1.25/—
<b>REAR SUSPENSION:</b> Type Standard Spring Cap. (Tot. lbs.) Leaves Per Spring Leaf Total Thickness (in.)	Semi-Elliptic 2-Stage Multi-Leaf 3750 6 2.19	Semi-Elliptic 2-Stage Multi-Leaf 3750 6 2.19
Rear Shock Absorbers Piston Diameter (mm) STD/OPT	32/—	32/—
<b>FRONT AXLE:</b> Type Make Maximum Capacity (lbs.) Standard Hub Locks Pinion/Ring Gear Type	Semi-Floating GM 3600 Manual Hypoid	Semi-Floating GM 3600 Manual Hypoid
<b>REAR AXLE:</b> Type Make Maximum Capacity (lbs.) Pinion/Ring Gear Type	Semi-Floating GM 3750 Hypoid	Semi-Floating GM 3750 Hypoid
<b>STANDARD TIRES:</b> Tire Capacity (lbs. each) Front/Rear Inflation (PSI) Max.	Tubeless SBR P235/75R15 1843 35	Tubeless SBR P235/75R15 1843 35
<b>WHEELS:</b> Size (in.) Front/Rear Capacity (lbs. each) Bolt Holes Bolt Circle Diameter (in.) Offset (mm) Revolutions per mile @ 45 MPH	15 x 6.00J 1843 6 5.5 0 722	15 x 6.00J 1843 6 5.5 0 722

<sup>1</sup>Based on model weight. Total available for equipment and cargo. <sup>2</sup>B3J Diesel N/A in California.



MODEL	V BLAZER/JIMMY 4X4	
	GAS	DIESEL <sup>2</sup>
MODEL NUMBER	V10516/ZW9	
	B3J	
<b>SUSPENSION (OPT.)</b>		
OPTION	F60	F60
PAYLOAD (Max. lbs.) <sup>1</sup>	1231	1029
GVWR (lbs.)	6100	6250
GAWR (lbs.): Front Rear	3526 3550	3526 3550
<b>FRONT SUSPENSION:</b> Type Standard Spring Cap. (Tot. lbs.)	Tapered Leaf 4500	Tapered Leaf 4500
Front Shock Absorbers Piston Diameter (mm) STD/OPT	32/—	32/—
Front Stabilizer Bar Diameter (in.) STD/OPT	1.25/—	1.25/—
<b>REAR SUSPENSION:</b> Type Standard Spring Cap. (Tot. lbs.) Leaves Per Spring Leaf Total Thickness (in.)	Semi-Elliptic 2-Stage Multi-Leaf 3750 6 2.19	Semi-Elliptic 2-Stage Multi-Leaf 3750 6 2.19
Rear Shock Absorbers Piston Diameter (mm) (STD/OPT)	32/—	32/—
<b>FRONT AXLE:</b> Type Make Maximum Capacity (lbs.) Standard Hub Locks Pinion/Ring Gear Type	Semi-Floating GM 3600 Manual Hypoid	Semi-Floating GM 3600 Manual Hypoid
<b>REAR AXLE:</b> Type Make Maximum Capacity (lbs.) Pinion/Ring Gear Type	Semi-Floating GM 3750 Hypoid	Semi-Floating GM 3750 Hypoid
<b>STANDARD TIRES:</b> Tire Capacity (lbs. each) Front/Rear Inflation (PSI) Max.	Tubeless SBR P235/75R15 1843 35	Tubeless SBR P235/75R15 1843 35
<b>WHEELS:</b> Size (in.) Front/Rear Capacity (lbs. each) Bolt Holes Bolt Circle Diameter (in.) Offset (mm) Revolutions per mile @ 45 MPH	15 x 6.00JJ 1843 6 5.5 0 722	15 x 6.00JJ 1843 6 5.5 0 722

<sup>1</sup>Based on model weight. Total available for equipment and cargo. <sup>2</sup>B3J Diesel N/A in California.

**1990  
V BLAZER/JIMMY**

**WHEEL AND TIRES**

**KEY:** — = Not Available  
 AS = All-Season  
 SBR = Street-Belted Radial Ply  
 BW = Blackwall  
 WW = Whitewall  
 WL = White Lettered  
 HWY = Highway  
 ON-OFF = On-Off Road  
 WOL = White Outline Lettered

**P-Metric Radial Tires**  
 The tire load range in P-Metric Radial Tires is not identified with letters such as B, C, and D or with ply ratings as in the Auto system. P-Metric tires are offered with a Standard Load Rating or Extra Load Rating which is related to tire pressure.—Standard Load—575psi Extra Load—44 psi  
 Maximum tire pressure will be stamped on the tire sidewall in metric and Pounds per square inch (PSI). In metric tire pressure, 7 Nio Pascals is equivalent to 1.01 bar (psi). For tire maximum load capacity, also be stamped on the tire sidewall in kilograms and pounds.

TIRE SIZE	TYPE	RPO	PLY	LOAD RANGE	TIRE CAPACITY (LBS. EA.)	INFLATION (PSI) MAX.	WHEEL SIZE (IN.)	WHEEL CAPACITY (LBS. EA.)	BOLT HOLES	BOLT CIRCLE DIA. (IN.)	OFFSET (MM)	REV. PER MILE @ 45 MPH
P235/75R15	AS SBR BW Front: Rear: Spare:	NFL YFL ZFL	—	Std	1843	35	15 x 6.0	1702	6	5.5	0	722
P235/75R15	AS SBR BW Front: Rear: Spare:	NES YES ZES	—	Std	1843	35	15 x 6.0	1702	6	5.5	0	722
P235/75R15	AS SBR WW Front: Rear: Spare:	XFM YFM ZFM	—	Std	1843	35	15 x 6.0	1702	6	5.5	0	722
P235/75R15	AS SBR WL Front: Rear: Spare:	XFN YFN ZFN	—	Std	1843	35	15 x 6.0	1702	6	5.5	0	722
P235/75R15	AS SBR WW Front: Rear: Spare:	XHB YHB ZHB	—	Std	1843	35	15 x 6.0	1702	6	5.5	0	722
31x10.50R/15-B <sup>3</sup>	SBR ON-OFF WOL Front: Rear: Spare:	XUZ YUZ ZUZ	—	Std	1775	35	15 x 6.0	1702	6	5.5	0	722

w N67, N90 Wheels Only

**V BLAZER/JIMMY OPTIONAL WHEELS**

RPO	DESCRIPTION	WHEEL SIZE (IN.)	CAPACITY	BOLT HOLES	BOLT CIRCLE DIA. (IN.)	OFFSET (MM)
N67	Wheels—Rally (Adds Trim Rings and Hub Caps)	15 x 8.0	3045	8	6.5	127
N90	Wheels—Aluminum, Cast (Includes 15 x 7 Wheels and Special Hub Caps)	15 x 7.0	1843	5	5.0	13

MODEL	V BLAZER/JIMMY 4X4	
	GAS	DIESEL <sup>1</sup>
MODEL NUMBER	V10516/ZW9	
	B3J	
<b>FRAME</b>		
Side Rail Dimensions:		
Width (in.)	2.30	2.30
Depth (in.)	5.92	5.92
Thickness (in.)	.156	.156
Section Modulus Rails only	3.14	3.14
RBM of Frame	122,460	122,460
Width Over Rails Front (in.)	28.01	28.01
Rear (in.)	33.95	33.95
Overall Length of Rail (in.)	181.52	181.52
<b>STEERING</b>		
Type	Var. Ratio Integral Power	Var. Ratio Integral Power
Steering Ratio On Center/At Lock	17.6/13.1:1	17.6/13.1:1
Turning Diameter: Curb-To-Curb (ft.) Wall-To-Wall (ft.)	37.0 39.4	37.0 39.4
<b>BRAKES</b>		
GVWR (lbs.)	6100	6250
Type	Vac. Power Front Disc/Rear Drum	Hyd. Power Front Disc/Rear Drum
Booster (Diaphragm Diameter) (in.)	9.5 x 9.0 Tandem	—
Front Rotor Size (Diameter x Thickness) (in.)	11.86 x 1.29	11.86 x 1.29
Front Facing Contact Per Axle (sq. in.)	37.63	37.63
Rear Drum Size (Diameter x Width) (in.)	11.15 x 2.75	11.15 x 2.75
Rear Facing Contact Per Axle (sq. in.)	107.42	107.42
Parking Brake Type	Cable To Rear Wheels	Cable To Rear Wheels

<sup>1</sup> B3J Diesel N.A. in California.




**FOUR-WHEEL DRIVE (V)**

MODEL	V BLAZER/JIMMY 4X4	
	GAS	DIESEL <sup>1</sup>
MODEL NUMBER	V10516/ZW9	
		B3J
<b>ELECTRICAL</b>		
ENGINE STD./OPT.	5.7L V8	6.2L V8 Diesel
<b>STANDARD BATTERY:</b> Cold Cranking Amps @ 0°F @ -20°F Reserve Capacity Minutes @ 80°F	630 490 115	Two With 540 Each 410 Each 115 Each
<b>STANDARD ALTERNATOR:</b> Max. Capacity (Amps) Max. Watts @ 12 Volts Nominal Amp @ Idle (Approx.) Drive Pulley Ratio Model Number	85 1020 30 2.7:1 CS130	66 792 46 3.1:1 12-SI-100
<b>OPTIONAL ALTERNATOR:<sup>2</sup></b> Max. Capacity (Amps) Max. Watts @ 12 Volts Nominal Amp @ Idle (Approx.) Drive Pulley Ratio Model Number	w/C60 100 1200 36 3.1:1 CS130	— — — — —

<sup>1</sup> B3J Diesel N/A in California. <sup>2</sup> Note: This Alternator is Available Only as Part of an RPO

**ALTERNATOR CURVES**

(Refer to Alternator Chart for Availability)

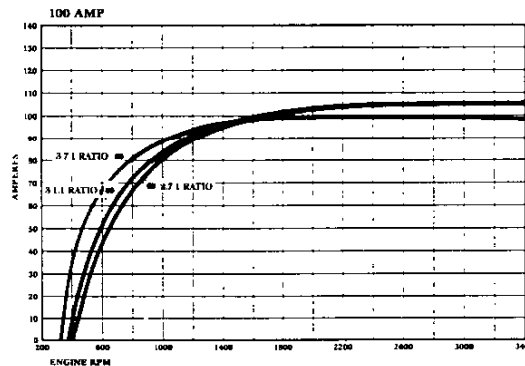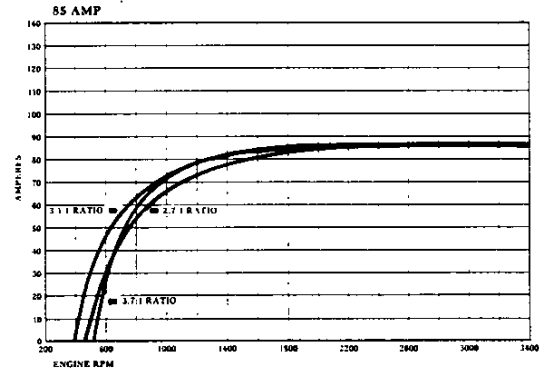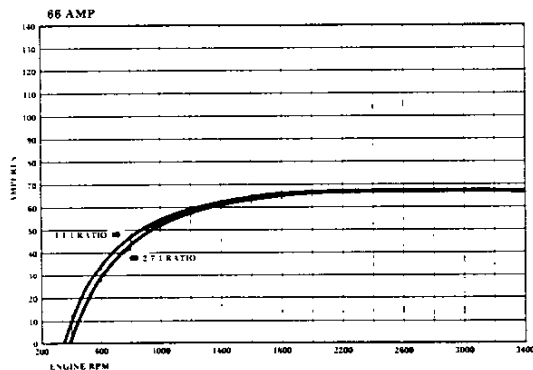

# COOLING

1990  
V BLAZER/JIMMY

KEY: Reg Type Manual Trans and Automatic Trans    Red Type Manual Trans Only    Bold Type Automatic Trans Only

MODEL	V BLAZER/JIMMY 4X4	
	GAS	DIESEL*
MODEL NUMBER	V10516/ZW9	
		<b>B3J</b>
<b>STANDARD COOLING SYSTEM</b>		
ENGINE	5.7L V8	6.2L V8 Diesel
Standard Radiator Thickness (in.)	.98	<b>1.97</b>
Total System Capacity (gal.)	4.3	<b>6.2</b>
Standard Fan (No. Blades x Diameter x Pitch)	3 x 19 x 2.01	<b>5 x 20 x 2.87</b>
<b>OPTIONAL COOLING SYSTEMS</b>		
ENGINE	5.7L V8	6.2L V8 Diesel
<b>AUTOMATIC TRANS.</b>	<b>MX0</b>	<b>MX0</b>
Radiator Thickness (in.)	<b>.98<sup>1</sup></b>	<b>1.97</b>
Total System Capacity (gal.)	<b>4.3</b>	<b>6.2</b>
Fan (No. Blades x Diameter x Pitch)	<b>3 x 19 x 2.01</b>	<b>5 x 20 x 2.87</b>
<b>OPT. H.D. RADIATOR</b>	V01	—
Radiator Thickness (in.)	1.57	—
Total System Capacity (gal.)	4.3	—
Fan (No. Blades x Diameter x Pitch)	5 x 19.5 x 2.01	—
<b>OPT. AIR CONDITIONING</b>	C60	<b>C60</b>
Radiator Thickness (in.)	.98	<b>1.97</b>
Total System Capacity (gal.)	4.3 <sup>2</sup>	<b>6.2</b>
Fan (No. Blades x Diameter x Pitch)	5 x 19.5 x 2.01	<b>5 x 20 x 2.87</b>
<b>OPT. H.D. RADIATOR AND TRANS. OIL COOLER</b>	<b>V02<sup>3</sup></b>	<b>V02<sup>3</sup></b>
Radiator Thickness (in.)	<b>1.57</b>	<b>1.97</b>
Total System Capacity (gal.)	<b>4.2</b>	<b>6.2</b>
Fan (No. Blades x Diameter x Pitch)	<b>5 x 19.5 x 2.01</b>	<b>5 x 20 x 2.87</b>
<b>OPT. AIR CONDITIONING AND TRANS. OIL COOLER</b>	<b>C60 and V02<sup>3</sup></b>	<b>C60 and V02<sup>3</sup></b>
Radiator Thickness (in.)	<b>1.57</b>	<b>1.97</b>
Total System Capacity (gal.)	<b>4.2</b>	<b>6.2</b>
Fan (No. Blades x Diameter x Pitch)	<b>5 x 19.5 x 2.01</b>	<b>5 x 20 x 2.87</b>

<sup>1</sup> 1.57 Inches with 3.42 and 3.73 Rear Axle Ratio    <sup>2</sup> 4.5 w/MX0 Automatic Transmission    <sup>3</sup> Included w/Z82 Trailering    \* B3J Diesel N/A In California

**FOUR-WHEEL DRIVE (4x4)**

MODEL	V BLAZER/JIMMY 4X4	
	GAS	DIESEL <sup>1</sup>
MODEL NUMBER	V10516/ZW9	
		B3J
<b>EXTERIOR DIMENSIONS:</b>		
<b>BODY:</b>		
Wheelbase (in.)	106.5	106.5
Overall Length (in.)	184.8	184.8
Overall Height (in.)	73.8	73.8
Maximum Width (in.)	79.6	79.6
Bumper to Axle—Front	33.8	33.8
Rear (in.)	44.5	44.5
Ground To Top of Rear Load Floor (in.)	32.1	32.1
Ground Clearance—Front	6.9	6.9
Rear (in.)	7.1	7.1
<b>INTERIOR:</b>		
Headroom (in.) Front/Rear	41.6/39.9	41.6/39.9
Leg Room (in.) Front/Rear	40.9/34.0	40.9/34.0
Shoulder Room (in.) Front/Rear	65.5/64.5	65.5/64.5
Hip Room (in.) Front/Rear	60.5/49.3	60.5/49.3
Cargo Volume w/Rear Seat (cu. ft.)	51.5	51.5
Cargo Volume w/o Rear Seat (cu. ft.)	106.5	106.5
Cargo Length w/Rear Seat (in.)	@ belt 33.0 / @ floor 40.5	@ belt 33.0 / @ floor 40.5
Cargo Length w/o Rear Seat (in.)	@ belt 65.6 / @ floor 76.6	@ belt 65.6 / @ floor 76.6
Cargo Area Width w/Rear Seat (in.)	50.0	50.0
Cargo Area Height w/Rear Seat (in.)	37.5	37.5
<b>FUEL TANK</b>		
Std. Tank Nominal (gal.)	31	32
Location of Tank	Inboard Frame Behind Rear Axle	Inboard Frame Behind Rear Axle
Location of Filler	Right Side (Rear)	Right Side (Rear)
Optional Tank Nominal (gal.)	—	—
Location of Tank	—	—
Location of Filler	—	—

<sup>1</sup>B3J Diesel N/A in California.

# OPTIONS

1990

V BLAZER/JIMMY

KEY: S Standard  
O Optional  
- Not Available

1. V Blazer/Jimmy (V10516/ZW9)  
2. V Blazer/Jimmy (V10516/ZW9/B3J)<sup>1</sup>

	CODE	DESCRIPTION	RESTRICTIONS	4-WHEEL DRIVE																		
				1	2																	
<b>AIR CONDITIONING</b>	C60	Incls 100 Amp Alternator w/o B3J Diesel <sup>1</sup>	N/A V10 Cold Climate	O	O																	
<b>AXLES, REAR</b> Locking Differential	G80	(See Powertrains)																				
<b>COLD CLIMATE PACKAGE</b>	V10	Incls K05 Engine Block Heater	N/A C60 Air, or B3J Diesel	O	-																	
<b>COOLING SYSTEM:</b> Engine Oil Radiator, Heavy-Duty	KC4 V01	Incl w Z82 Trailering	N/A B3J Diesel N/A C60 Air, V02 Cooling or B3J Diesel	O	-																	
Radiator and Transmission Oil, Heavy-Duty	V02	Incl w/Z82 Trailering	N/A MM4 Trans	O	O																	
<b>CONVENIENCE PACKAGE</b> Driver's	ZQ3	Incls Comfortilt Steering Wheel and Electronic Speed Control	N/A L05 Eng. w/MM4 Trans	O	O																	
Operating	ZQ2	Incls Power Door Locks and Power Windows		O	O																	
<b>ENGINES</b> 5.7-liter V8 6.2-liter V8 Diesel <sup>1</sup>	L05 LH6	(See Powertrains)		S	-																	
<b>GLASS</b> Deep Tinted Rear Window	AJ1			O	O																	
<b>HARNES, WIRING</b>	UY7	Trailer, Heavy-Duty; 7-Lead; Incl w/Z82 Trailering		O	O																	
<b>HUB, LOCKING</b>	X6Z	Automatic		O	O																	
<b>MIRROR</b> Exterior	D45	Below-Eye-Line Type; Stainless Steel		O	O																	
Mirror, Outside Electric	D48	Remote Electric		O	O																	
<b>PAINT, EXTERIOR</b> Solid Conventional Two-Tone Special Two-Tone Deluxe Two-Tone	ZY1 ZY2 ZY3 ZY4	(See Color and Trim)		O	O																	
<b>RADIO EQUIPMENT</b> Electronically-Tuned AM/FM Stereo Radio w/Seek-Scan and Digital Clock	UM7	14 presets, digital display, two 3.5" front/two 4" x 10" rear speakers, 28 watts total power output. Incls mast antenna	(Std on GMC Models with YE9 SLE Trim)	O	O																	
Electronically-Tuned AM Stereo/FM Stereo Radio w/Seek-Scan, Stereo Cassette Tape and Digital Clock	UM6	14 presets, digital display, two 3.5" front/two 4" x 10" rear speakers, 28 watts total power output. Incls mast antenna	Reqs YE9 Silverado/SLE	O	O																	
Electronically-Tuned AM Stereo/FM Stereo Radio w/Seek-Scan, Stereo Cassette Tape w/Search-Repeat, Graphic Equalizer and Digital Clock	UX1	14 presets, digital display, two 3.5" front/two 4" x 10" rear speakers, 28 watts total power output. Incls mast antenna	Reqs YE9 Silverado/SLE	O	O																	
Radio Delete	UL5			O	O																	

B3J Diesel N/A in California.

KEY: S Standard  
O Optional  
— Not Available


1. V Blazer/Jimmy (V10516/ZW9)  
2. V Blazer/Jimmy (V10516/ZW9/B3J)<sup>1</sup>

				MODELS														
				4-WHEEL DRIVE														
				1	2													
OPTION	CODE	DESCRIPTION	RESTRICTIONS															
<b>SEATING NOTE:</b> One of the Following Must Be Chosen: Rear Folding, 3-Passenger	AM7	Avail With or Without Shoulder Belts		O	O													
Rear Seat Not Desired	YG4			O	O													
<b>SHIELD, FUEL TANK</b>	NY1	Incls Protective Shield on Transfer Case		O	O													
<b>SHOCKS, FRONT QUAD</b>	Z75			O	O													
<b>SHOULDER BELT, REAR SEAT</b>	AK9	Req w/AM7		O	O													
<b>SILVERADO/SLE</b>	YE9	(See Trim Level Section)		O	O													
<b>SPRINGS</b>	F60	Front, Heavy-Duty: Capacity 2250-lb each: Incls HD Front and Rear Shocks: Recommended for Front Mounted Accessory Applications Only		O	O													
<b>TIRE EQUIPMENT</b> P235/75R15	XFL YFL ZFL XES YES ZES XFM YFM ZFM XFN YFN ZFN XHB YHB ZHB	(See Wheels and Tires for details)	ZES Spare Tire Optional  ZFM Spare Tire Optional  ZFN Spare Tire Optional  ZHB Spare Tire Optional		S	S												
31 x 10.50R15-B	XUZ YUZ ZUZ		ZUZ Spare Tire Optional	O	O													
<b>TRAILER HITCH</b> Weight Distributing Platform Type	VR4		Incl w/Z82 Trailering	O	O													
<b>TRAILERING SPECIAL EQUIPMENT:</b>	Z82	Incls VR4 Hitch, UY7 Wiring and V02 Trans Oil Cooler: w/o B3J Diesel Incls KC4 Engine Oil Cooler	Reqs 3.42 or 3.73 Rear Axle; N/A MM4 Trans.	O	O													
<b>TRANSMISSIONS</b> 4-Speed Manual 4-Speed Automatic w/Overdrive	MM4 <sup>2</sup> MX0	(See Powertrains)																
<b>WHEEL TRIM</b>	P01	Wheel Covers; Incl w/YE9 Silverado/SLE	N/A N67 Rally or N90 Aluminum Wheels	O	O													
<b>WHEELS</b> Rally	N67	Steel Rally Wheels (Adds Trim Rings and Hub Caps)		O	O													
Aluminum, Cast	N90	Cast Alum. Wheels; Incl Spare Steel Wheel		O	O													
<b>WINDOWS</b> Sliding Side Quarter	AD5			O	O													

<sup>1</sup> B3J Diesel N/A in California. <sup>2</sup> MM4 Transmission N/A in California.



**SOLID  
COLOR  
(ZY1)**

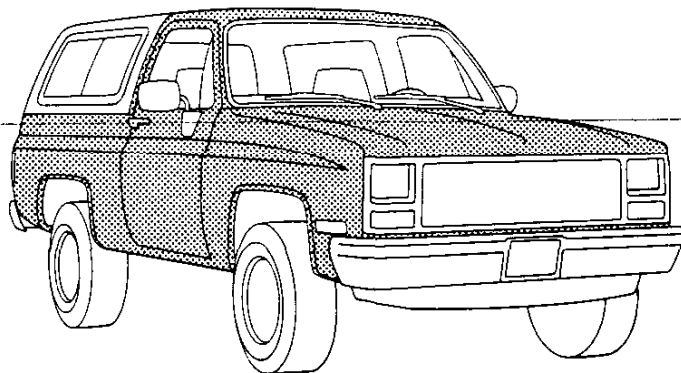

Solid color (ZY1) paint is standard on all models. All painted areas of the body and front end sheet metal, except the hard top are painted the same color. Colors for the hard top vary according to exterior body color. Below are the interior trim color and exterior paint combinations recommended by Chevrolet/GMC; however, any available interior trim color may be ordered. For further information, refer to Seats and Interior Trim pages as well as the Order Guide.


KEY: —Not Available

EXTERIOR COLORS		STRIPE COLORS	INTERIOR COLORS				TOP COLORS*
COLOR 1	COLOR 2		Dk. Blue	Garnet	Saddle	Slate Gray	
20 Onyx Black	—	—	•	•	•	•	White/Black
27 Smoke Blue Met.	—	—	•	—	—	•	White/Midnight Blue
33 Mojave Beige	—	—	—	•	—	—	Beige/Gold
36 Wintergreen Met.	—	—	—	—	•	—	Beige/Gold
50 Summit White	—	—	•	—	—	—	White/Midnight Blue
	—	—	—	•	—	—	White/Black
	—	—	—	—	•	—	White/Gold
	—	—	—	—	—	•	White/Black/Gray
74 Fire Red	—	—	—	•	•	—	White/Black/Gray
83 Gray Met.	—	—	•	•	—	•	White/Black/Gray
96 Quicksilver Met.	—	—	•	•	—	•	White/Black/Gray
98 Midnight Blue Met.	—	—	•	—	—	—	White/Midnight Blue

\* Top color must be specified: White-12K, Black-19K, Beige-33K, Gold-34K, Gray-83K, Midnight Blue-98K.

# CONVENTIONAL TWO-TONE (ZY2)

Conventional two-tone (ZY2) paint colors are available on all models and include the YG3 molding package consisting of black body side and rear moldings with bright trim, bright wheel opening moldings, bright trim for front side marker lights and tail lights, and deluxe front and rear chromed bumpers with rub strips and front black bumper guards. Color code 1 is applied to the areas above and below the moldings in front of the front wheel well and color code 2 is applied to the areas below the moldings. Colors for the hard top vary according to the exterior body colors selected. Below are the interior trim color and exterior paint combinations recommended by Chevrolet/GMC. The only available color code 1/color code 2 exterior color combinations are those shown in the chart below, however, any available interior trim color may be ordered.

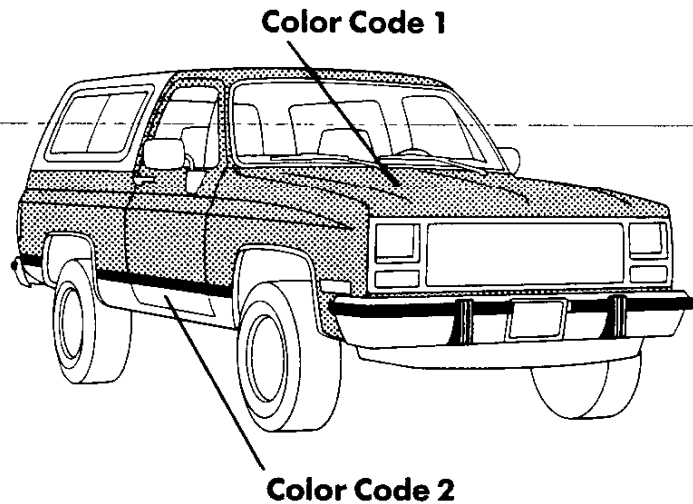


KEY: — Not Available

EXTERIOR COLORS		STRIPE COLORS	INTERIOR COLORS				TOP COLORS*
COLOR 1	COLOR 2		Dk. Blue	Garnet	Saddle	Slate Gray	
20 Onyx Black	34 Sunset Gold Met.	—			•		Black
	83 Gray Met.	—		•		•	Black
	96 Quicksilver Met.	—		•		•	Black
	74 Fire Red	—		•		•	Black
	50 Summit White	—		•		•	Black
27 Smoke Blue Met.	98 Midnight Blue Met.	—	•				Midnight Blue
	50 Summit White	—	•			•	White
33 Mojave Beige	20 Onyx Black	—			•		Beige
	34 Sunset Gold Met.	—		•	•		Beige
36 Wintergreen Met.	33 Mojave Beige	—			•		Beige
	34 Sunset Gold Met.	—			•		Gold
50 Summit White	20 Onyx Black	—	•	•	•	•	White
	27 Smoke Blue Met.	—	•				White
	34 Sunset Gold Met.	—			•		White
	83 Gray Met.	—	•	•			White
	98 Midnight Blue Met.	—	•				White
	74 Fire Red	—		•		•	White
74 Fire Red	20 Onyx Black	—		•			Black
	83 Gray Met.	—		•			Gray
	50 Summit White	—		•		•	White
83 Gray Met.	20 Onyx Black	—		•		•	Gray
	74 Fire Red	—		•		•	Gray
	50 Summit White	—		•		•	Gray
	96 Quicksilver Met.	—		•		•	Gray
96 Quicksilver Met.	20 Onyx Black	—		•		•	Black
	98 Midnight Blue Met.	—	•			•	Midnight Blue
	83 Gray Met.	—				•	Gray
98 Midnight Blue Met.	27 Smoke Blue Met.	—	•				Midnight Blue
	34 Sunset Gold Met.	—			•		Midnight Blue
	96 Quicksilver Met.	—	•			•	Midnight Blue
	50 Summit White	—	•				Midnight Blue

\* Top color must be specified: White-12K, Black-19K, Beige-33K, Gold-34K, Gray-83K, Midnight Blue-98K.

**SPECIAL  
TWO-TONE  
(ZY3)**

Special two-tone (ZY3) paint colors include a hood ornament, dual-tone body side and rear tape decal striping keyed to the exterior body color. This striping is applied to the front fenders, side doors and body sides and rear. The areas above the striping are painted color code 1 (except the hard top in some cases), and the areas below the striping are painted color code 2 as well as the area forward of the front wheel well. A bright spring-loaded, stand-up type hood ornament is also included (standard on diesel models). Below are the interior trim color and exterior paint combinations recommended by Chevrolet/GMC. They are the only available interior and exterior combinations allowed. For further information, refer to Seats and Interior Trim pages as well as the Ordering Guide.

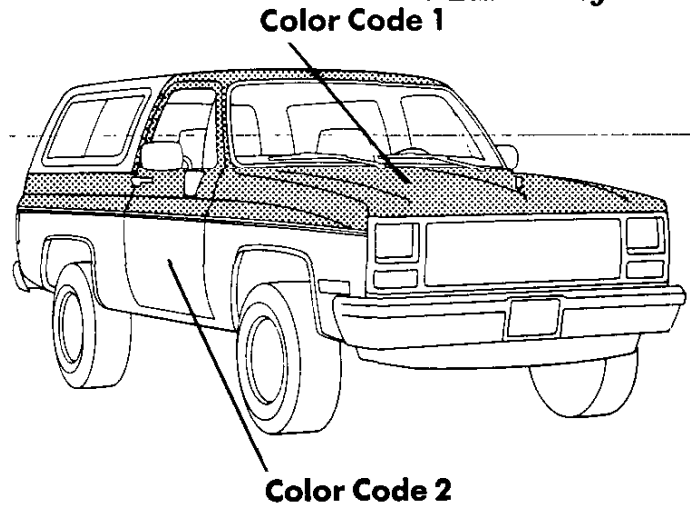


EXTERIOR COLORS		STRIPE COLORS	INTERIOR COLORS				TOP COLORS*	
COLOR 1	COLOR 2		Dk. Blue	Garnet	Saddle	Slate Gray		
20 Onyx Black	34 Sunset Gold Met.	Gold/Black			•		Black	
	83 Gray Met.	Vermillion/Black		•			Black	
	83 Gray Met.	Silver/Black				•	Black	
	96 Quicksilver Met.	Vermillion/Slate				•	Black	
	96 Quicksilver Met.	Vermillion/Dk. Carmine		•			Black	
	74 Fire Red	Vermillion/Slate				•	Black	
	74 Fire Red	Vermillion/Black		•			Black	
	50 Summit White	Vermillion/Dk. Carmine		•			Black	
	50 Summit White	Silver/Black				•	Black	
	27 Smoke Blue Met.	98 Midnight Blue Met.	Lt. Blue/Dk. Blue	•				Midnight Blue
50 Summit White		Lt. Blue/Dk. Blue	•				White	
50 Summit White		Dk. Blue/Slate				•	White	
33 Mojave Beige	34 Sunset Gold Met.	Gold/Black			•		Beige	
	34 Sunset Gold Met.	Dk. Brown/Almond		•			Beige	
	20 Onyx Black	Gold/Black			•		Beige	
36 Wintergreen Met.	33 Mojave Beige	Almond/Dk. Brown			•		Gold	
	34 Sunset Gold Met.	Almond/Dk. Brown			•		White	
	20 Onyx Black	Vermillion/Black	•				White	
50 Summit White	20 Onyx Black	Vermillion/Dk. Carmine		•			White	
	20 Onyx Black	Almond/Dk. Brown			•		White	
	20 Onyx Black	Silver/Black				•	White	
	27 Smoke Blue Met.	Lt. Blue/Dk. Blue	•				White	
	34 Sunset Gold Met.	Dk. Brown/Almond			•		White	
	83 Gray Met.	Vermillion/Dk. Carmine		•			White	
	83 Gray Met.	Lt. Blue/Dk. Blue	•				White	
	74 Fire Red	Vermillion/Slate				•	White	
	98 Midnight Blue	Lt. Blue/Dk. Blue	•				White	
	74 Fire Red	Vermillion/Dk. Carmine		•			White	
	74 Fire Red	20 Onyx Black	Vermillion/Black		•			Black
		83 Gray Met.	Vermillion/Carmine		•			Gray
		50 Summit White	Vermillion/Carmine		•			White
		20 Onyx Black	Vermillion/Dk. Carmine		•			Gray
33 Gray Met.	20 Onyx Black	Silver/Black				•	Gray	
	74 Fire Red	Vermillion/Slate				•	Gray	
	50 Summit White	Vermillion/Dk. Carmine		•			Gray	
	50 Summit White	Silver/Black				•	Gray	
	74 Fire Red	Vermillion/Dk. Carmine		•			Gray	
	96 Quicksilver Met.	Vermillion/Dk. Carmine		•			Gray	
	96 Quicksilver Met.	Vermillion/Slate				•	Black	
	96 Quicksilver Met.	Vermillion/Dk. Carmine		•			Black	
96 Quicksilver Met.	20 Onyx Black	Vermillion/Black				•	Midnight Blue	
	98 Midnight Blue Met.	Lt. Blue/Dk. Blue	•				Gray	
	83 Gray Met.	Vermillion/Slate				•	Midnight Blue	
98 Midnight Blue Met.	27 Smoke Blue Met.	Lt. Blue/Dk. Blue	•				Midnight Blue	
	34 Sunset Gold Met.	Gold/Black			•		Midnight Blue	
	96 Quicksilver Met.	Lt. Blue/Dk. Blue	•				Midnight Blue	
	96 Quicksilver Met.	Vermillion/Slate				•	Midnight Blue	
	50 Summit White	Lt. Blue/Dk. Blue	•				Midnight Blue	

\* Top color must be specified: White-12K, Black-19K, Beige-33K, Gold-34K, Gray-83K, Midnight Blue-98K.

# DELUXE TWO-TONE (ZY4)

Deluxe two-tone (ZY4) paint color schemes include the molding package described under Conventional two-tone. In addition, it includes a hood ornament and dual-tone body side and rear tape decal striping keyed to the exterior body color. This striping is applied to the front fenders, side doors and body side and rear. The areas above the striping and below the moldings are painted color code 1 (except the hardtop in some cases). Color code 2 is used between the striping and the moldings as well as the area forward of the front wheel well. A bright spring-loaded, stand-up type hood ornament is also included (standard on diesel models). Below are the interior trim color and exterior paint combinations recommended by Chevrolet/GMC. They are the only available interior and exterior combinations allowed. For further information, refer to Seats and Interior Trim pages as well as the Ordering Guide.

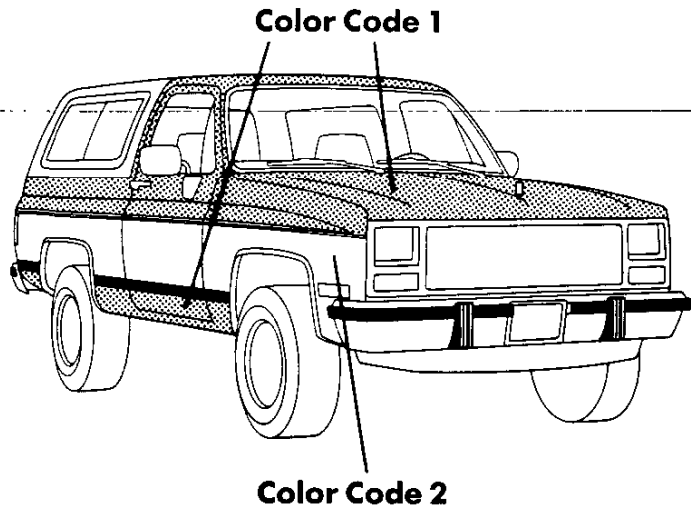

EXTERIOR COLORS		STRIPE COLORS	INTERIOR COLORS				TOP COLORS*	
COLOR 1	COLOR 2		Dk. Blue	Garnet	Saddle	Slate Gray		
20 Onyx Black	34 Sunset Gold Met.	Gold/Black			•		Black	
	83 Gray Met.	Vermillion/Black		•			Black	
	83 Gray Met.	Silver/Black				•	Black	
	96 Quicksilver Met.	Vermillion/Slate				•	Black	
	96 Quicksilver Met.	Vermillion/Dk. Carmine		•			Black	
	74 Fire Red	Vermillion/Slate				•	Black	
	74 Fire Red	Vermillion/Black		•			Black	
	50 Summit White	Vermillion/Dk. Carmine		•			Black	
	50 Summit White	Silver/Black				•	Black	
	27 Smoke Blue Met.	98 Midnight Blue Met.	Lt. Blue/Dk. Blue	•				Midnight Blue
50 Summit White		Lt. Blue/Dk. Blue	•				White	
50 Summit White		Dk. Blue/Slate				•	White	
33 Mojave Beige	34 Sunset Gold Met.	Gold/Black		•			Beige	
	34 Sunset Gold Met.	Dk. Brown/Almond			•		Beige	
	20 Onyx Black	Gold/Black			•		Beige	
36 Wintergreen Met.	33 Mojave Beige	Almond/Dk. Brown			•		Beige	
	34 Sunset Gold Met.	Almond/Dk. Brown			•		Gold	
50 Summit White	20 Onyx Black	Vermillion/Black	•				White	
	20 Onyx Black	Vermillion/Dk. Carmine		•			White	
	20 Onyx Black	Almond/Dk. Brown			•		White	
	20 Onyx Black	Silver/Black				•	White	
	27 Smoke Blue Met.	Lt. Blue/Dk. Blue	•				White	
	34 Sunset Gold Met.	Dk. Brown/Almond			•		White	
	83 Gray Met.	Vermillion/Dk. Carmine		•			White	
	83 Gray Met.	Lt. Blue/Dk. Blue	•				White	
	74 Fire Red	Vermillion/Slate				•	White	
	98 Midnight Blue Met.	Lt. Blue/Dk. Blue	•				White	
	74 Fire Red	Vermillion/Dk. Carmine		•			White	
	74 Fire Red	20 Onyx Black	Vermillion/Black		•			Black
		83 Gray Met.	Vermillion/Carmine		•			Gray
		50 Summit White	Vermillion/Carmine		•		•	White
		83 Gray Met.	20 Onyx Black	Vermillion/Dk. Carmine		•		
20 Onyx Black	Silver/Black					•	Gray	
74 Fire Red	Vermillion/Slate					•	Gray	
50 Summit White	Vermillion/Dk. Carmine			•			Gray	
50 Summit White	Silver/Black					•	Gray	
74 Fire Red	Vermillion/Dk. Carmine			•			Gray	
96 Quicksilver Met.	Vermillion/Dk. Carmine			•			Gray	
96 Quicksilver Met.	Vermillion/Slate					•	Gray	
96 Quicksilver Met.	20 Onyx Black		Vermillion/Dk. Carmine		•			Black
	20 Onyx Black		Vermillion/Black				•	Black
	98 Midnight Blue Met.	Lt. Blue/Dk. Blue	•			•	Midnight Blue	
	83 Gray Met.	Vermillion/Slate				•	Gray	
98 Midnight Blue Met.	27 Smoke Blue Met.	Lt. Blue/Dk. Blue	•				Midnight Blue	
	34 Sunset Gold Met.	Gold/Black			•		Midnight Blue	
	96 Quicksilver Met.	Lt. Blue/Dk. Blue	•				Midnight Blue	
	96 Quicksilver Met.	Vermillion/Slate				•	Midnight Blue	
	50 Summit White	Lt. Blue/Dk. Blue	•				Midnight Blue	

\* Top color must be specified: White-12K, Black-19K, Beige-33K, Gold-34K, Gray-83K, Midnight Blue-98K