


C10 & K10 SERIES SUBURBAN CARRYALLS

1971 -- ORIGINAL

ì `

GVW Ratings up to 5400 lb


C10 SERIES—SUBURBAN CARRYALLS

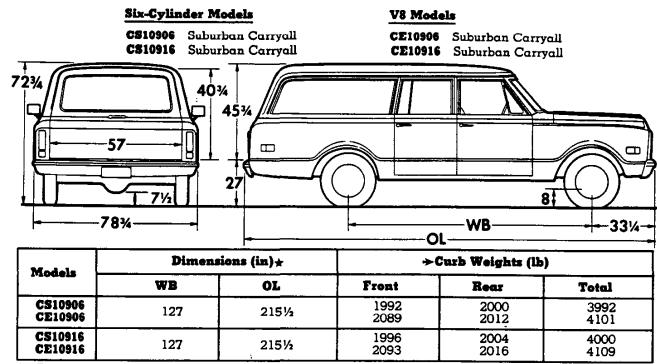

★Dimensions with std equipment, unloaded.

GVW Ratings up to 5800 lb

K10 SERIES-SUBURBAN CARRYALLS*

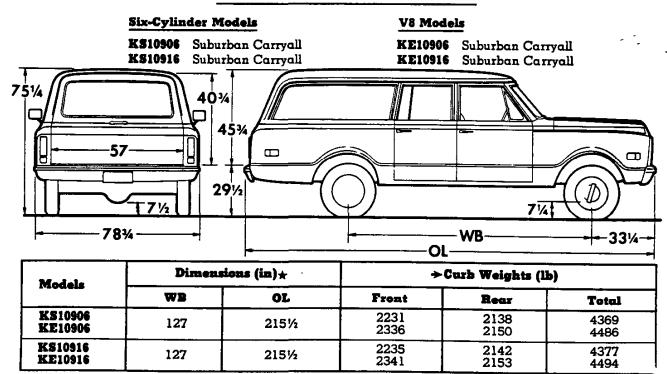

- ★ Dimensions with std equipment, unloaded.
- Illustration shows 16 model rear end/lift gate.

March 15, 1971

→Indicates Change

Conventional Gasoline—10: Page 1:

C10 SERIES SUBURBAN CARRYALLS

STANDARD EQUIPMENT

Air Cleaner: Oiled-paper element

Axle, Front: Independent; capacity 2700 lb

Axle, Rear: Hypoid semi-floating type; ratio 3.73; capacity 3500 lb

➤ Battery: 12-volt; side terminal connectors

CS10: 54-plate; capacity 45 amp-hr CE10: 66-plate; capacity 61 amp-hr

Bodies: See Model Options and Cabs, Bodies & Colors section

Brakes, Service: Hydraulic; vacuum power; self-adjusting; dual system

Front: Single-piston caliper disc type, 11.86" rotor

Rear: Drum and shoe type; size—11" x 2" Rear brake area: drum 138.2 sq in; lining 84.4 sq in

Brake, Parking: Cable to rear wheels; area 84.4 sq in; foot operated

Bumpers: Front & rear; painted

Carburetor: CS10: single-barrel downdraft CE10: two-barrel downdraft

Clutch: CS10: diameter 10"; area 100 sq in CE10: diameter 11"; area 124 sq in

Cooling: CS10: 1¼" radiator core, cross-flow type; 446-sq-in area; 15-lb pressure cap CE10: 1¼" radiator core, cross-flow type; 480-sq-in area; 15-lb pressure cap

Controls & Instruments: Light switch; windshield wiper-washer switch; headlight beam control; speedometer; odometer; fuel gauge. Lights for generator, oil pressure, engine temperature, brake warning, direction signals and high beam indicator. Ignition switch with accessory position. Direction signal switch with freeway lane-change position. Hazard warning switch

Doors, Rear:

06 models: Two; side-hinged 16 models: Tail/lift gate

Doors, Side: Three; two right & one left

Emission Control Equipment: See engine & clutch section for types used

 Engine: CS10: 250 Six
 145 @ 4200 rpm

 Gross horsepower
 110 @ 4000 rpm

 Net horsepower
 230 @ 1600 rpm

 Gross torque, lb-ft
 185 @ 1600 rpm

 CE10: 307 V8

Gross horsepower. 200 @ 4600 rpm

Net horsepower. 135 @ 4000 rpm

Gross torque, lb-ft. 300 @ 2400 rpm

Net torque, lb-ft. 235 @ 2400 rpm

Exhaust System: Single; fully aluminized; unitized muffler-tailpipe

Filter, Fuel: Plastic mesh in fuel tank

CS10: Paper type in carburetor

CE10: Sintered bronze in carburetor

Filter, Oil: Full-flow; 1-quart; throwaway type

Frame: 39,000-lb-test steel; section modulus 2.98

Fuel Pump: Mechanically actuated diaphragm

Generator: 37-amp Delcotron

GVW Plate: See GVW Selector

Heater & Defroster: Deluxe-Air

Lights & Reflectors: Two 7" Power Beam headlights; two Class A front combination parking/direction signals; two Class A rear combination tail/stop/direction signals; two front & two rear side marker combination lights & reflectors; two backup: one license; instrument panel & dome. Front side marker lights flash with turn signals

Mirror, Rearview: Exterior chrome RH & LH $4\frac{1}{2}$ " x 6" head with fixed arm and inside 10" vinyl-edged prismatic

Seat: Full-width bench; front only; vinyl trim

Seat Belts: Includes retractors, driver & passenger

Shock Absorbers: Front & rear; piston diameter 1"

Springs, Front: Coil; capacity 1350 lb each

Springs, Rear: Coil; capacity 1350 lb each

Steering: Ball-gear; ratio 24:1; wheel, oval 171/2" x 17", 2-spoke

Tank, Fuel: Inside frame at rear; capacity approximately 21 gal; pressure/vacuum relief cap; antioverfill

Tires: Five bias-belted ply tubeless G78-15B(4PR) front, single rear and spare

Tools: 2500-lb mechanical jack; wheel wrench

Transmission: 3-speed fully synchronized; steering column gearshift; ratios 2.85, 1.68, 1.00, 2.95 (rev)

Wheels: Five 15" x 6"; attachment 5 studs on 5" circle; spare carrier inside RH cargo area; four painted hubcaps

Windshield Wipers & Washer: Electric; 2-speed wipers

GVW SELECTOR

GVW	Minim	GVW Rating	
Rating (lb)	Tires, Front	Tires, Rear	Chassis Equipment
4800	G78-15B(4PR) (TL or TB)	G78-15B(4PR) (TL or TB)	Standard
	H78-15B(4PR) (TL)	H78-15B(4PR) (TL)	2000-lb ea rear spring
5400	6.50-16C(6PR) (TB) (TT)	or 6.50-16C(6PR) (TB) (TT)	ZOOPID ed ledt spillig

TL-Tubeless

TB-Tube type

TT-Truck type

K10 SERIES SUBURBAN CARRYALLS

STANDARD EQUIPMENT

Air Cleaner: Oiled-paper element

Axle, Front: Hypoid, ratio 3.73; capacity 3300 lb; 40-degree turn angle; yoke and trunnion universal joints

Axle, Rear: Hypoid semi-floating type; ratio 3.73; capacity 3300 lb

➤ Battery: 12-volt; side terminal connectors

KS10: 54-plate; capacity 45 amp-hr KE10: 66-plate; capacity 61 amp-hr

Bodies: See Model Options and Cabs, Bodies & Colors section

Brakes, Service: Hydraulic; vacuum power; selfadjusting; dual system

Front: Single-piston caliper disc type, 11.86" rotor

Rear: Drum & shoe type; size—11" x 2"

Rear brake area: drum 138.2 sq in; lining 84.4 sq in

Brake, Parking: Cable to rear wheels; area 84.4 sq in; foot operated

Bumpers: Front & rear, painted

Carburetor: KS10: single-barrel downdraft
KE10: two-barrel downdraft

Clutch: KS10: diameter 10'; area 100 sq in KE10: diameter 11'; area 124 sq in

Cooling: KS10: 14" radiator core, cross-flow type;
446-sq-in area; 15-lb pressure cap
KE10: 14" radiator core, cross-flow type;
480-sq-in area; 15-lb pressure cap

Controls & Instruments: Windshield wiper-washer switch; light switch; headlight beam control; speed-ometer; odometer; fuel gauge. Lights for generator, oil pressure, engine temperature, brake warning, direction signals and high beam indicator. Ignition switch with accessory position. Direction signal switch with freeway lane-change position. Hazard warning switch

Doors, Rear:

06 models: Two; side-hinged 16 models: Tail/lift gate

Doors, Side: Three; two right & one left

Emission Control Equipment: See engine & clutch section for types used

Engine: KS10: 250 Six

 Gross horsepower
 145 @ 4200 rpm

 Net horsepower
 110 @ 4000 rpm

 Gross torque, lb-ft
 230 @ 1600 rpm

 Net torque, lb-ft
 185 @ 1600 rpm

 KE10: 307 V8

 Gross horsepower
 200 @ 4600 rpm

 Net horsepower
 135 @ 4000 rpm

 Gross torque, lb-ft
 300 @ 2400 rpm

Exhaust System: Single; fully aluminized; unitized muffler-tailpipe

Filter, Fuel: Plastic mesh in fuel tank

KS10: Paper type in carburetor

KE10: Sintered bronze in carburetor

Filter, Oil: Full-flow; 1-quart; throwaway type

Frame: 39,000-lb-test steel; section modulus 3.48

Fuel Pump: Mechanically actuated diaphragm

Generator: 37-amp Delcotron

GVW Plate: See GVW Selector

Heater & Defroster: Deluxe-Air

Lights & Reflectors: Two 7" Power Beam headlights; two Class A front combination parking/direction signals; two Class A rear combination tail/stop/direction signals; two front & two rear side marker combination lights & reflectors; two backup; one license; instrument panel & dome. Front side marker lights flash with turn signals

Mirror, Rearview: Exterior chrome RH & LH 4½" x 6" head with fixed arm and inside 10" vinyl-edged prismatic

Seat: Full-width bench; front only; vinyl trim

Seat Belts: Driver & passenger. Includes retractors

Shock Absorbers: Front & rear; piston diameter 1"

Springs, Front: Tapered-leaf; capacity 1450 lb each Springs, Rear: Two-stage, combination multi-leaf & tapered-leaf; capacity 1800 lb each

Steering: Ball-gear, ratio 24:1; wheel, oval 171/2" x 17", 2-spoke

Tank, Fuel: Inside frame at rear; capacity approx-21 gal; pressure/vacuum relief cap; anti-overfill

Tires: Five bias-belted ply tubeless G78-15B(4PR) front, single rear and spare

Tools: 2500-lb mechanical jack; wheel wrench

Transfer Case: New Process 205, 2-speed; ratios 1.96 and 1.00; power take-off opening on left side, single control lever

Transmission: 3-speed fully synchronized; steering column gearshift; ratios 3.03, 1.75, 1.00, 3.02 (rev)

Wheels: Five 15" x 6.0"; attachment, 6 studs on $5\frac{1}{2}$ " circle; spare carrier inside RH cargo area

Windshield Wipers & Washer: Electric; 2-speed wipers

GVW SELECTOR

GVW Rating	Minimum Equipment Required for GVW Rating						
(lb)	Tires, Front	Tires, Rear	Chassis Equipment				
5200	G78-15B(4PR) (TL or TB)	G78-15B(4PR) (TL or TB)					
5800	H78-15B(4PR) (TL)	H78-15B(4PR) (TL)	Standard				
5000	6.50-16C(6PR) (TB) (TT)	or 6.50-16C(6PR) (TB) (TT)					

TL—Tubeless

March 15, 1971

TB—Tube type

TT-Truck type

→Indicates Change

10 SERIES POWER TEAMS SUBURBAN CARRYALL

C10 SERIES

	TRANSMISSION	AXI	LE RATIOS	
engine		STD	OPT	
250 Six	Chevrolet 3-Speed	3.73	3.07; 4.11	
292 Six	Chevrolet CH465 4-Speed	3.73	3.07; 4.11	
250 Six	Powerglide	3.73	4.11	
250 Six 292 Six	Turbo Hydra-matic	3.73	3.67; 4.11	
	Chevrolet 3-Speed	3.73	3.07; 4.11	
ľ	Chevrolet CH465 4-Speed	3.07	3.73; 4.11	
307 V8	Powerglide	3.73	4.11	
İ	Turbo Hydra-matic	3.07	3.73; 4.11	
	Chevrolet 3-Speed H.D.	3.07	3.73; 4.11	
350 V8	Chevrolet CH465 4-Speed	3.07	3.73; 4.11	
*****	Turbo Hydra-matic	- 3.07	3.73; 4.11	
	Chevrolet 3-Speed H.D.	3.07		
400 V8	Turbo Hydra-matic	3.07	l –	

K10 SERIES

engine		TRANSFER	AXLE RATIOS		
	Transmission	CASE	STD	OPT	
250 Six Chev	Chevrolet 3-Speed H.D.		3.73	-	
	Chevrolet CH465 4-Speed	New Process 205	3.73		
	Turbo Hydra-matic		3.73	1	
	Chevrolet 3-Speed H.D.		3.73	-	
307 V8	Chevrolet CH465 4-Speed	New Process 205	3.73		
-	Turbo Hydro-matic	-	3.73		
	Chevrolet 3-Speed H.D.		3.07	3.73	
350 V8	Chevrolet CH465 4-Speed	New Process 205	3.07	3.73	
	Turbo Hydra-matic		3.07	3.73	

OPTIONAL ENGINE RATINGS

CS/ES10 with 292 Six	CE/KE10 with 350 V8
Gross Horsepower 165 @ 4000 rpm Net Horsepower 125 @ 3600 rpm Gross Torque, lb-ft 270 @ 1600 rpm Net Torque, lb-ft 225 @ 2400 rpm	Gross Horsepower 250 @ 4600 rpm Net Horsepower 170 @ 3600 rpm Gross Torque, lb-ft 350 @ 3000 rpm Net Torque, lb-ft 310 @ 2400 rpm

CE10 with 400 V8

Gross Horsepower	300	0	4800	rpm
Net Horsepower	240	0	4400	грm
Gross Torque, lb-ft	. 400	0	3200	грш
Net Torque, lb-ft	340	6	3200	rpm

C10 SERIES-2-WHEEL DRIVE SUBURBAN CARRYALL K10 SERIES-4-WHEEL DRIVE SUBURBAN CARRYALL

1971 MODELS WITH STANDARD EQUIPMENT

	Model Number and Description	Wheel- base	Pactory D & H	List Price	Mir's Sgt'd Retail Price +	Desti- nation Charge & Group Number	Total
+6-Cyl	inder 145-hp High Torque 25	O Engine					
C\$109	06 Suburban Carryall						
ES10	(Panel Doors)	127"	\$190.00	\$3398.00	\$3588.00	1\$	
CS104	(Panel Doors)	127"	223.00	4001.00	4224.00	16	******************************
E 5109	(End Gate)	1 27 "	192.00	3428.00	3620,00	15	******************************
	Suburban Carryall (End Gate)	127"	225.00	4031.00	4256.00	16	
→ 8-Cyl	inder 200-hp High Torque En	aine					
CE101	06 Suburban Carryall						
KE 109	(Panel Doors)	127"	196.00	3513.00	3709.00	15	
CE109	(Panel Doors)	127"	229.00	4116.00	4345.00	16	***************************************
	(End Gate)	127"	198.00	3543.00	3741.00	15	
KE101	Suburban Carryali (End Gate)	127"	231,00	4146.00		16	

^{*} Manufacturer's Suggested Retail Prices do not include state and local taxes, license fees, options or accessories.

OPTIONS AND ACCESSORIES WHEN INSTALLED BY CHEVROLET

Description .	Optica Number	Pactery D & H	List Price	Mir's Suggested Retail Delivered Price+
MODEL OF				
Custem Beluxe: See Exterior and Interior Color Chart for interior colors. Includes vent window and windshield moldings; bright control knob trim; fender nameplates; color-keyed floor mat; white hardboard headlining; sidewall trim panels; spare wheel cover; cigar lighter; special insulation; dual horns; front door dome lamp switches; bright glove box nameplate and dome lamp bezel When standard front seat is specified. Also includes full-depth foam				
seat with cloth trim When optional center or rear seats are not ordered. When optional center seat is ordered. Also includes matching cloth center	Z62	\$ 8.90	\$167.00	\$175.90
seat	760	9.45	177.00	186.45
When bucket seats or when custom deluxe front seat is ordered	Z62	9.95	187.00	196.95
When optional center or rear seats are not ordered. When optional center seat is ordered. When optional center and rear seat is ordered. Also includes color-keyed	262 262	6.80 6.80	127.00 127.00	133.80 133.80
rear floor mat.	262	7.85	147.00	154.85
Enginee: POWER TEAMS	AND AXIES			
292 Siz. CS-KS10 models only. Not available when Poweralide transmission				
is ordered. Includes 11° clutch. 350 VS. CE-KE10 models only. Includes 4-barrel carburetos, 3.07 ratio rear	L25	4.80	90.00	94.80
400 VS. CE10 models only. Not available when Powervilde or Chevrolet	LS9	2.25	42.00	44.25
4-speed transmission is ordered. Includes 4-barrel carburetor, dual exhausts, 12° coil clutch, 3.07 ratio rear axle with standard or	1			
Turbo Hydra-matic transmission. Liquid Petroleum Gas Conversion. C10 models only. Not available when	L47	8.80	165.00	173.80
automatic transmission, HD clutch, 307 or 400 engine is ordered. Includes internal modifications of valves, compression ratio and heat shield only.	L56	4.80	90.00	94.80
Transmissione:				04.00
Powerglide. C10 models with standard engine only. Not available when 3.07 or 3.73 ratio rear axle is specified with 6.50-16 tires. Includes HD radiator. Turbo Hydra-matic. Includes HD radiator. CE10 models also includes 3.07 ratio rear axle.	м35	10.65	200.00	210.65
Without 400 engine With 400 engine	M49 M49	12.25 12.80	230.00 240.00	242.25 252.80
Chevrolet 4-Speed. Not available when 400 engine is ordered. CE10 models include 3.07 ratio rear axle.	м20	5.60	105.00	110.60

[◆] State and local taxes not included.

→Indicates Change

C-K10 SERIES SUBURBAN CARRYALL

	Option Number	Factory D & H	List Price	Mir's Suggeste Retail Delivers Price
Axles, Rear:				
3.07 Ratio. C10 models only. Not available when Powerglide transmission is ordered. Included when Turbo Hydra-matic or Chevrolet 4-speed transmission is ordered with 307 engine or when 3-speed or Turbo Hydra-matic transmission is ordered with 400 engine. Also included when 350 engine				
is ordered	H01	\$.65	\$12.00	\$12.65
3.73 Ratio. Available only when 350 engine is ordered. Also available on C10 models when Turbo Hydra-matic or Chevrolet 4-speed transmission is ordered with 307 engine	H05	.65	12.00	12.65
4.11 Ratio. C10 models only. Not available when 400 engine is ordered With 250, 292 or 307 engine	Н04	.65	12.00	12.65
With 350 engine Without air conditioning	H04	.80	14.40	15.20
With air conditioning.	H04	.65	12.00	12.65
Positraction	G8Q	3.30	62.00	65.30
CIHER OP Rir Cleaner: Oil-bath. Capacity 1 quart. Not available on CE-KE10 models when 350 or 400 engine is ordered		.55	10.00	10.55
tis Conditioning Interior Roof Mounted: V8 model only. Available only		33.25	625.00	658.25
when custom deluxe is ordered. Includes MD radiator and 42-amp generator	C69	33.23	024.00	000.0
Satteries: 12-volt	TP2	2.40	45.00	47.40
Auxiliary. 53-amp-hr, 9-plate	T60	.90	16.00	16.90
Belts, Seat: Installed for third passenger Front Seat. Not available when bucket seats are ordered	AM3	.35	6.50	6.8
Center Seat.	A68	.35	6.50	6.89
Center and Rear Seats	A68	.70	13.00	13.79 31.69
Sumpers: Chromed. Front and rear		1.60	30.00	
Caps, Hub: Chromed. C10 models only	P03	.55	10.00	10.5
Clutch, Heavy-Duty: Diameter 11". CS-KS10 models only. Included when	MOI	.35	6.50	6.8
Chevrolet 4-speed transmission or 292 engine is ordered	•	J		
Chevrolet 4-speed transmission or 292 engine is ordered	VO1	1.35	25.00	26.3
Chevrolet 4-speed transmission or 292 engine is ordered	VO1	-		
Chevrolet 4-speed transmission or 292 engine is ordered. Cocling: HD radiator only. Included when air conditioning or automatic ransmission is ordered. Gauges: Anneter temperature and oil pressure.	253	.65 2.95	25.00 12.00 55.00	12.6
Chevrolet 4-speed transmission or 292 engine is ordered. Cocling: HD radiator only. Included when air conditioning or automatic transmission is ordered. Gauges: Ammeter, temperature and oil pressure	253 U16	.65 2.95 1.20	12.00 55.00 22.00	26.3 12.6 57.9 23.2
Chevrolet 4-speed transmission or 292 engine is ordered. Cocling: HD radiator only. Included when air conditioning or automatic ransmission is ordered. Gauges: Ammeter, temperature and oil pressure. Tachometer, ammeter, temperature and oil pressure.	253 U16 K79	.65 2.95	12.00 55.00	12.65 57.95

 $[\]otimes$ State and local taxes not included.

C-K10 SERIES SUBURBAN CARRYALL OPTIONS AND ACCESSORIES WHEN INSTALLED BY CHEVROLET

Description	Option Number	Factory D & H	List Price	Mir's Suggested Retail Delivered Price⊕
Guards, Door Edge	. В93	\$.45	\$ 8.00	\$ 8.45
Hooks, Towing: Two, front. Not available with chromed bumper		1.00	18.00	19.00
Hubs, Front Free-Wheeling: K10 models only. Manual control at hubs	. F7 6	3.90	73.00	76.90
Lamps: Roof Marker, Five		1.35	25.00	26.35
Lighter, Cigar: Included when custom deluxe is ordered	. U37	.30	5.00	5.30
Mirrors, Exterior: Replacing standard LH and RH mirrors Below-Eye-Line type 7.5" x 10.5" painted	. D29	1.05	10.50	00.55
7.5" x 10.5" stainless steel	. DG4	1.05	19.50 35.00	20.55 36. 9 0
Camper type Painted	. DF1	1.05	19.50	20.55
Stainless steel		2.65	49.00	20.55 51.65
Moldings, Custom: Belt Line. Includes bright fuel filler cap		1.90	35.00	36.90
Lower Fender, Door and Body. Includes bright fuel filler cap	BX2	2.15	40.00	42.15
Paints, Exterior: See Color and Trim Chart Solid color		N.C.	N C	N.C
Conventional two-tone. With white secondary color		2.15	N.C. 40.00	N.C. 42.15
Special two-tone. With white upper and lower secondary colors. Available	•			12.10
only when custom lower moldings are ordered		3.20	60.00	63.20
Plate: Serial Number (State of Pennsylvania "K" Plate). Available on C1(models only when 2000-lb each HD rear springs are ordered		N.C.	N O	N.C
Radies: Pushbutton control. Includes manual front antenna	. 200	N.C.	N.C.	N.C.
AM	. U63	3.50	65.00	68.50
AM/FM	. U69	7.55	141.00	148.55
Seats, Front: See Exterior and Interior Color Chart. Custom Deluxe Vinyl, Full-Width. Available in parchment trim only Includes front seat area carpeting.				
When optional rear seats are not ordered	. A52	3.65	68.00	71.65
When center seat is ordered. Also includes center seat area carpeting When center and rear seats are ordered. Also includes center and rear	. A52	6.30	118.00	124.30
seat area carpeting	. A52	8.45	158.00	166.45
Bucket; Driver and Passenger. Available in parchment trim only. Include front seat area floor carpeting and center console.	•			
When optional rear seats are not ordered. When center seat is ordered. Also includes center seat area carpeting	. A50	6.55 9.25	123.00 173.00	129.55 182.25
When center and rear seats are ordered. Also includes center and rear seat area carpeting.		11.35	213.00	224.35
Seats, Rear: Seat trim always matches the front seats whether standard or optional. The price of matching seat trim is included when custom deluxed optional front seats are ordered. Includes RH coat hook. Center Seat. Available only when H78-15/B or truck-type tires are ordered includes HD front and rear springs on C10 models only, LH and RH armrests.			210.00	
and seat belts	AS3	6.00	112.00	118.00
are ordered. Includes HD front and rear springs on C10 models only, LH and RH armrests and seat belts.		11.50	216.00	227.50
Shock Absorbers:	701			
Front and Rear, Heavy-duty		.80 .45	15.00 8.00	15.80 8.45
Superlift Rear. C10 models only.		2.40	45.00	47.40
Springs, Heavy-Duty:				
Front Capacity 1500-lb each. C10 models only. Included when center or rear sequ		ļ		
is ordered		.35	6.00	6.35
Capacity 1750-lb each. K10 models only. Rear. Capacity 2000-lb each. C10 models with HD front springs only. In-	F60	1.65	31.00	32.65
cluded when center or rear seats are ordered	G50	1.00	18.00	19.00
Auxiliary Rear. Capacity 500-lb each. C10 models only	G60	1.55	29.00	30.55
Stabilizer, Front: C10 models only	F59	1.00	18.00	19.00
Steering, Power:		ł		
C10 models only. K10 models only.		6.65 7.45	125.00 140.00	131.65 147.45
Steering Wheel, Comfortilt: Available only when optional transmission is ordered				
Switches, Dome Lamp: Front doors. Included when custom deluxe is	1	2.95	55.00	57.95
ordered	C80	.25	4.00	4.25
Throttle Control: Manual	K31	.75	14.00	14.75
Tires: See following page				
Wheel Covers, Bright Metal: C10 models with G78-15 or H78-15 tires	DO1		25.00	06.05
only	PO1	1.35	25.00	26.35

[♦] State and local taxes not included.

C-K10 SERIES SUBURBAN CARRYALL

TUBE-TYPE TIRES (Factory installed)

Tire Size and Type All tires have black sidewalls except as indicated. Note: Front and rear tires must be of the same construction, rim width and diameter. K10 models require use of same tread type on front and rear wheels.		All tires have black sidewalls except as indicated. ote: Front and rear tires must be of the same construction, rim width and diameter. K10 models require use of same tread type on front and Option Width Included Number Option		Factory D & H	List Price	Mfr's Suggeste Retail Delivere Price©
i/B —Highway	(5) Front, rear & spare (2) Front: C10 only	6.00 6.00	RL5 RL5	N.C. N.C.	\$10.00 4.00	\$10.00 4.00
Belted Ply On-Off Road	(3) Front & spare; C10 only . (5) Front, rear & spare;	6.00	RLS		_	6.00 21.25
Bias Belted Ply	K10 only (2) Rear; C10 only (3) Rear & spare; C10 only	6.00 6.00 6.00	RL4 RL4 RL4	.75 .30 .45	8.20 12.30	8.50 12.75
6/C —Highway Original Equipment	(2) Front; C10 only	5.00	R61 R61 R61	1.25 .50 .75	31.50 12.60 18.90	32.75 13.10 19.65
-On-Off Road Original Equipment	(5) Front, rear & spare; K10 only	5.00 5.00	R69 R69 R69	2.25 .90 1.35	49.00 19.60 29.40	51.25 20.50 30.75
	ım Tire Capacity (Each)—Fro	ont (1610) I	lear (1610)	3 25	71.50	74.75
—Highway Nylon	(2) Front; C10 only	5.00	R65 R65	1.30 1.95	28.60 42.90	29.90 44.85
—On-Off Road Nylon	(2) Rear: C10 only	5.00	R64 R64 R64	6.50 2.60 3.90	124.00 49.60 74.40	130.50 52.20 78.30
	TUBELESS	TIRES (F	actory Installed	1)		
5/B —Highway	(5) Front, rear & spare	6.00	Std	N.C.	N.C.	N.C.
Bias Belted Ply	(White Stripe)		PU8	1.30	31.00	32.30
-On-Off Road Bias Belted Ply	K10 only	6.00	RL3 RL3 RL3	1.00 .40 .60	17.50 7.00 10.50	18.50 7.40 11.10
5/B			7170	1 75	22 50	24.25
—Highway Bias Belted Ply	(2) Front; C10 only	6.00	PV5 PV5 PV5	.70 1.05	9.00 13.50	9.70 14.55
	(White Stripe)	. 6.00	PV6	3.10	56.50	59.60
-On-Off Road Bias Belted Ply	K10 only	. 6.00	RM1 RM1 RM1	2.75 1.10 1.65	40.00 16.00 24.00	42.75 17.10 25.65
	res have black sides at and rear fires mu width and diameter models require use or wheels. B	res have black sidewalls except as indicated. at and rear tires must be of the same construction, width and diameter. models require use of same tread type on front and r wheels. (5) Front, rear & spare. (2) Front; C10 only. Bias (2) Front, C10 only. On-Off Read (5) Front, rear & spare; K10 only. (3) Rear & spare; C10 only. (3) Rear & spare; C10 only. (4) Front, rear & spare. (5) Front, rear & spare. (6) Front, rear & spare. (7) Only. (8) Front & spare; C10 only. (9) Front & spare; C10 only. (1) Front & spare; C10 only. (2) Front; C10 only. (3) Front & spare; C10 only. (4) Rear; C10 only. (5) Front, rear & spare. (6) Front, rear & spare. (7) Front; C10 only. (8) Front, rear & spare. (9) Front; C10 only. (1) Front; C10 only. (2) Front; C10 only. (3) Front & spare; C10 only. (4) Front; C10 only. (5) Front, rear & spare. (6) Front, rear & spare. (7) Front; C10 only. (8) Front, rear & spare; (9) Front; C10 only. (10) Rear; C10 only. (2) Rear; C10 only. (3) Rear & spare; C10 only. (4) Rear; C10 only. (5) Front, rear & spare. (6) Front, rear & spare. (7) Front; C10 only. (8) Front as spare; C10 only. (9) Rear; C10 only. (10) Rear & spare; C10 only. (11) Front; C10 only. (12) Rear; C10 only. (13) Rear & spare; C10 only. (14) Front; C10 only. (15) Front; rear & spare. (16) Front; rear & spare. (17) Front; C10 only. (18) Front; C10 only. (19) Front; C10 only. (19) Front; C10 only. (10) Front; rear & spare. (10) Front; C10 only. (10) Front; C10 only. (10) Front; rear & spare. (10) Front; C10 only. (10) Front; C10 only. (10) Front; rear & spare. (10) Front; C10 only. (10) Front	res have black sidewalls except as indicated. at and rear tires must be of the same construction, width and diameter. models require use of same tread type on front and rear tires must be of the same construction, width and diameter. models require use of same tread type on front and rear tires option Fig. Highway (5) Front, rear & spare (6.00 6.00 8elted Ply (2) Front, conditions of the same construction, with a spare; K10 only (3) Rear & spare; C10 only (4) Rear; C10 only (5) Front, rear & spare; (6.00 (6) Rear & spare; C10 only (7) Rear & spare; C10 only (8) Front, rear & spare (9) Rear; C10 only (1) Rear; C10 only (2) Rear; C10 only (3) Rear & spare; C10 only (4) Rear & spare; C10 only (5) Front, rear & spare (6) Read (7) Front, rear & spare (8) Front, rear & spare (9) Rear; C10 only (1) Front, rear & spare (10) Read (10) Front, rear & spare; (10) Rear; C10 only (10) Rear; C10 only (10) Rear; C10 only (11) Rear; C10 only (12) Rear; C10 only (13) Rear & spare; C10 only (14) Rear; C10 only (15) Front, rear & spare (16) Rear; C10 only (16) Rear; C10 only (17) Rear; C10 only (18) Rear; C10 only (19) Rear; C10 only (19) Rear; C10 only (10) Rear & spare; C10 only (10) Rear & spare; C10 only (10) Rear; C10 only (10) Re	res have black sidewalls except as indicated. at and rear tires must be of the same construction, width and diameter. models require use of same tread type on front and related traces.	Tex have black sidewalls except as indicated, at and rear tires must be of the same construction, width and diameter.	Pectory Pectors Pect

[♦] State and local taxes not included.

C20 & K20 SERIES SUBURBAN CARRYALLS

GVW Ratings up to 7500 lb


C20 SERIES—SUBURBAN CARRYALLS*

Six-Cylinder Models

V8 Models

CS20906 CS20916 Suburban Carryall Suburban Carryall

CE20906 Suburban Carryall CE20916 Suburban Carryall

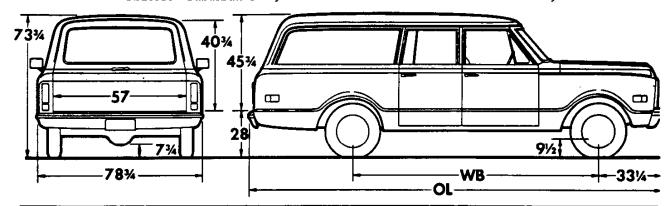

Models	Dimensions (in)★		>Curb Weights (lb)		
Models	WB	OL	Front	Rear	Total
CS20906 CE20906	127	2151/2	2073 2174	2243 2258	4316 4432
CS20916 CE20916	127	2151/2	2077 2178	2247 2262	4324 4440


- **★Dimensions** with std equipment, unloaded.
- ellustration shows 16 model rear end/lift gate.

K20 SERIES—SUBURBAN CARRYALLS*

Six-Cylinder Models

K\$20906 Suburban Carryall K\$20916 Suburban Carryall V8 Models

KE20906 Suburban Carryall KE20916 Suburban Carryall

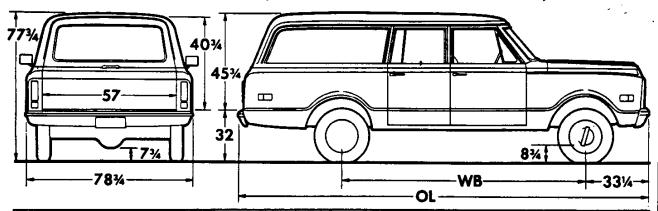

Models	Dimens	Dimensions (in)★		→ Curh Weights (lb)		
	WB OL From		Front	Rear	Total	
KS20906 KE20906	127	2151/2	2275 2382	2355 2368	4630 4750	
KS20916 KE20916	127	2151/2	2279 2387	2359 2371	4638 4758	

- ★ Dimensions with std equipment, unloaded.
- Illustration shows 16 model rear end/lift gate.

March 15, 1971

→ Indicates Change

Conventional Gasoline—20: Page

C20 SERIES SUBURBAN CARRYALLS

STANDARD EQUIPMENT

Air Cleaner: Oiled-paper element

Axle, Front: Independent; capacity 3000 lb

Axle, Rear: Hypoid full-floating type; ratio 4.57; capacity 5200 lb

➤ Battery: 12-volt; side terminal connectors CS20: 54-plate; capacity 45 amp-hr CE20: 66-plate; capacity 61 amp-hr

Bodies: See Model Options and Cabs, Bodies & Colors section

Brakes, Service: Hydraulic; vacuum power; self-adjusting; dual system

Front: Single-piston caliper disc type, 12.5" rotor Rear: Drum and shoe type; size—11" x 2 %" Rear brake area: drum 190.1 sq in; lining 113.9 sq in

Brake, Parking: Cable to rear wheels; area 113.9 sq in; foot operated

Bumpers: Front & rear, painted

Carburetor: CS20: single-barrel downdraft CE20: two-barrel downdraft

Clutch: CS20: diameter 10"; area 100 sq in CE20: diameter 11"; area 124 sq in

Cooling: CS20: 1¼" radiator core, cross-flow type; 446-sq-in area; 15-lb pressure cap CE20: 1¼" radiator core, cross-flow type; 480-sq-in area; 15-lb pressure cap

Controls & Instruments: Light switch; windshield wiper-washer switch; headlight beam control; speedometer; odometer; fuel gauge. Lights for generator, oil pressure, engine temperature, brake warning, direction signals and high beam indicator. Ignition switch with accessory position. Direction signal switch with freeway lane-change position. Hazard warning switch

Doors, Rear:

06 models: Two; side-hinged 16 models: Tail/lift gate

Doors, Side: Three; two right & one left

Emission Control Equipment: See Engine & Clutch section for types used

Engine:

 CS20: 250 Six
 145 @ 4200 rpm

 Gross horsepower
 110 @ 4000 rpm

 Net horsepower
 110 @ 4000 rpm

 Gross torque, lb-ft
 230 @ 1600 rpm

 Net torque, lb-ft
 185 @ 1600 rpm

 CE20: 307 V8
 215 @ 4800 rpm

 Gross horsepower
 135 @ 4000 rpm

 Net horsepower
 135 @ 4000 rpm

 Gross torque, lb-ft
 305 @ 2800 rpm

 Net torque, lb-ft
 230 @ 2000 rpm

Exhaust System: Single; fully aluminized; unitized muffler-tailpipe

Filter, Fuel: Plastic mesh in fuel tank; paper type in carburetor

Filter, Oil: Full-flow; 1-quart; throwaway type

Frame: 39,000-lb-test steel; section modulus 3.71

Fuel Pump: Mechanically actuated diaphragm

Generator: 37-amp Delcotron

GVW Plate: See GVW Selector

Heater & Defroster: Deluxe-Air

Lights & Reflectors: Two 7" Power Beam headlights; two Class A front combination parking/direction signals; two Class A rear combination tail/stop/direction signals; two front & two rear side marker combination lights & reflectors; two backup; one license; instrument panel & dome. Front side marker lights flash with turn signals

Mirror, Rearview: Exterior chrome RH & LH $4\frac{1}{2}$ " x 6" head with fixed arm and inside 10" vinyl edged prismatic

Seat: Full-width bench; front only; vinyl trim

Seat Belts: Driver & passenger; includes retractors

Shock Absorbers: Front & rear; piston diameter 1"

Springs, Front: Coil; capacity 1500 lb each

Springs, Rear: Two-stage, coil; capacity 2000 lb each

Steering: Ball-gear, ratio 24:1; wheel, oval 171/2" x 17", 2-spoke

Tank, Fuel: Inside frame at rear; capacity approximately 22 gal

Tires: Four tubeless 8.75–16.5C(6PR) nylon front and single rear

Tools: 4000-lb mechanical jack; wheel wrench

Transmission: 3-speed fully synchronized; steering column gearshift; ratios 2.85, 1.68, 1.00, 2.95 (rev)

Wheels: Five 16.5'' x 6.0''; attachment, 8 studs on 6'' circle; spare carrier inside RH cargo area; 4 painted hubcaps

Windshield Wipers & Washer: Electric; 2-speed wipers

GVW SELECTOR

GVW	Minimum Equipment Required for GVW Rating				
Rating (lb)	Tires, Front	Tires, Rear	Chassis Equipment		
6200	8.75-16.5C (6PR)	8.75-16.5C (6PR)	Standard		
6700	8.75-16.5C (6PR)	8.75-16.5D (8PR)	2000 lb on ross spring		
7500	9.50-16.5D (8PR)	9.50-16.5D (8PR)	3000-lb ea rear spring		

K20 SERIES SUBURBAN CARRYALLS

STANDARD EQUIPMENT

Air Cleaner: Oiled-paper element

Axle, Front: Hypoid; ratio 4.55; capacity 3500 lb; yoke and trunnion universal joints

Axle, Rear: Hypoid full-floating type; ratio 4.57; capacity 5200 lb

➤ Battery: 12-volt; side terminal connectors KS20: 54-plate; capacity 45 amp-hr KE20: 66-plate; capacity 61 amp-hr

Bodies: See Model Options and Cabs, Bodies & Colors section

Brakes, Service: Hydraulic; vacuum power; self-adjusting; dual system

Front: Single-piston caliper disc type, 12.5" rotor

Rear: Drum and shoe type; size 12" x 2" Rear brake area: drum 150.8 sq in; lining 89.0 sq in

Brake, Parking: Cable to rear wheels; area 89.0 sq in; foot operated

Bumpers: Front & rear, painted

Carburetor: KS20: single-barrel downdraft KE20: two-barrel downdraft

Clutch: KS20: diameter 10"; area 100 sq in KE20: diameter 11"; area 124 sq in

Cooling: KS20: 1¼" radiator core, cross-flow type; 446-sq-in area; 15-lb pressure cap KE20: 1¼" radiator core, cross-flow type; 480-sq-in area; 15-lb pressure cap

Controls & Instruments: Light switch; windshield wiper-washer switch; headlight beam control; speed-ometer; odometer; fuel gauge. Lights for generator, oil pressure, engine temperature, brake warning, direction signals and high beam indicator. Ignition switch with accessory position. Direction signal switch with freeway lane-change position. Hazard warning switch

Doors, Rear:

06 models: Two; side-hinged 16 models: Tail/lift gate

Doors, Side: Three; two right & one left

Emission Control Equipment: See Engine & Clutch section for types used

Engine: KS20: 250 Six

Gross horsepower	110 @ 4000 rpm 230 @ 1600 rpm
Net torque, lb-ft	185 @ 1600 rpm
KE20: 307 V8	
Gross horsepower	215 @ 4800 rpm
Net horsepower	135 @ 4000 rpm
Gross torque, lb-ft	305 @ 2800 rom
Net torque, lb-ft	. 230 @ 2000 rpm

Exhaust System: Single; fully aluminized; unitized muffler-tailpipe

Filter, Fuel: Plastic mesh in fuel tank; paper type in carburetor

Filter, Oil: Full-flow; 1-quart; throwaway type

Frame: 39,000-lb-test steel; section modulus 3.48

Fuel Pump: Mechanically actuated diaphragm

Generator: 37-amp Delcotron

GVW Plate: See GVW Selector

Heater & Defroster: Deluxe-Air

Lights & Reflectors: Two 7" Power Beam headlights; two Class A front combination parking/direction signals; two Class A rear combination tail/stop/direction signals; two front and two rear side marker combination lights and reflectors; two backup; one license; instrument panel and dome. Front side marker lights flash with turn signals

Mirror, Rearview: Exterior chrome RH & LH $4\frac{1}{2}$ " x 6" head with fixed arm and inside 10" vinyl edged prismatic

Seat: Full-width bench; front only; vinyl trim

Seat Belts: Driver & passenger; includes retractors

Shock Absorbers: Front & rear; piston diameter 1"

Springs, Front: Tapered-leaf; capacity 1600 lb each

Springs, Rear: Two-stage; combination multi-leaf & tapered-leaf; capacity 1900 lb each

Steering: Ball-gear, ratio 24:1; wheel, oval $17\frac{1}{2}$ " x 17", 2-spoke

Tank, Fuel: Inside frame at rear; capacity approx 22 gal

Tires: Four tubeless 8.75—16.5C (6PR) nylon front, single rear

Teels: 4000-lb mechanical jack; wheel wrench

Transfer Case: New Process 205, 2-speed; ratios 1.96 & 1.00, power take-off opening at left side, single control lever

Transmission: 3-speed fully synchronized; steering column gearshift; ratios 3.03, 1.75, 1.00, 3.02 (rev)

Wheels: Five 16.5" \times 6.0"; attachment, 8 studs on $6\frac{1}{2}$ " circle; spare carrier inside RH cargo area

Windshield Wipers & Washer: Electric; 2-speed wipers

GVW SELECTOR

GVW Rating	Minimum Equipment Required for GVW Rating				
(lb)	Tires, Front	Tires, Rear	Chassis Equipment		
6400	8.75-16.5C (6PR)	8.75-16.5C (6PR)	Standard		
7200	8.75-16.5C (6PR)	8.75-16.5D (8PR)			
7500	9.50-16.5D (8PR)	9.50-16.5D (8PR)	2500-lb ea rear spring		

20 SERIES POWER TEAMS SUBURBAN CARRYALS.

C20 SERIES

		- A.	ELE RAT	ios
ENGINE	Transmission	Chev Rear	Dana Roar Axio	
		Std	Opt	Included
	Chevrelet 3-Speed	4.57	4.10	_
	Chevrolet CH465 4-Speed	4.57	4.10	
250 Six	Powerglide	4.57	4.10	
	Turbo Hydra-matic	4.57	4.10	-
292 Six	Chevrolet 3-Speed	4.57	4.10	
307 V8	Chevrolet CH465 4-Speed	4.10	4.57	1
307 V8	Powerglide	4.57	4.10	
292 Six 307 V8	Turbo Hydre-metic	4.10	4.57	_
	Chevrolet 3-Speed H.D.	4.57	4.10	<u> </u>
	Chevrolet CH465 4-Speed	4.10	4.57	
350 V8	New Process 435CR 4-Speed	4.57	4.10	
	Turbo Hydrs-matic	4.10	4.57	<u> </u>
	Chevrolet 3-Speed H.D.	_		3.54
400 V8	Chevrolet CH465 4-Speed	_	<u> </u>	3.54
	Turbo Hydra-matic	_		3.54

K20 SERIES

		TRANSFER	AXLE RATIOS		
ENGINE	Transmission	CASE	STD	OPT	
250 Six	Chevrolet 3-Speed H.D.		4.57	_	
292 Six	Chevrolet CH465 4-Speed		4.57	1	
	Turbo Hydre-metic	New Process	4.57	_	
307 V8	Chevrolet 3-Speed H.D.	205	4.57	_	
350 V8	Chevrolet CH465 4-Speed	7	4.57†	_	
	Turbo Hydra-matic	7	4.57†	_	

^{†4.10} ratio used with 350 V8.

OPTIONAL ENGINE RATIO

CS, K\$20 with 292 Six	J., Z20 with 350 V8
Gross Horsepower 165 @ 4000 rpm Net Horsepower 125 @ 3600 rpm Gross Torque, lb-ft 270 @ 1600 rpm Net Torque, lb-ft 225 @ 2400 rpm	Gross Horsepower 250 @ 4600 rpm Net Horsepower 170 @ 3600 rpm Gross Torque, lb-ft 350 @ 3000 rpm Net Torque, lb-ft 310 @ 2400 rpm

CE20 with 400 V8

Gross Horsepower	.300 @ 4800 rpm
Net Horsepower	.240 @ 4400 rpm
Gross Torque, lb-ft	.400 @ 3200 rpm
Net Torque, lb-ft	.340 @ 3200 rpm

C20 SERIES—2-WHEEL DRIVE SUBURBAN CARRYALL K20 SERIES—4-WHEEL DRIVE SUBURBAN CARRYALL

1971 MODELS WITH STANDARD EQUIPMENT

М	Iodel Number and Description	Wheel- base	Factory D & H	List Price	Mfz's Sgt'd Retail Price ±	Desti- nation Charge & Group Number	Total
-6-Cyline	der 145-hp High Torque	250 Engine			-		
C520906	Suburban Carryall	- 1					
K\$20906	(Panel Doors) Suburban Carryall	127"	\$198.00	\$3551.00	\$3749.00	15	••••
C\$20916	(Panel Doors)	127*	237.00	4269.00	4506.00	16	***************************************
KS20916	(End Gate)	127*	199.00	3581.00	3780.00	15	
	(End Gate)	127'	239.00	4299.00	4538.00	16	
-8-Cyline	der 215-hp High Torque	307 Engine					
CE20906	Suburban Carryall	g-					
KE20906	(Panel Doors)		204.00	3666.00	3870.00	15	
CE20916	(Panel Doors) Suburban Carryall	127"	243.00	4384.00	4627.00	16	
KE20916	(End Gate)	127"	205.00	3696.00	3901.00	15	************
	(End Gate)	127"	245.00	4414.00	4659.00	16	

^{*} Manufacturer's Suggested Retail Prices do not include state and local taxes, license fees, options or accessories.

Description	Option Number	Pactory D & H	List Price	Mir's Suggested Retail Delivered Price⊕
MODEL O	PTION		•	-
Custom Deluxe: See Exterior and Interior Color Chart for interior colors. Includes vent window and windshield moldings; bright control knob trim; fender nameplates; color-keyed floor mat; white hardboard headlining; sidewall trim panels; cigar lighter; dual horns; special insulation; front door dome lamp switches; bright glove box nameplate and dome lamp bezel. Also includes spare tire cover when spare tire is ordered.				
With standard front seat. Also includes full-depth foam seat with cloth trim When optional center or rear seats are not ordered	700			
When optional center seat is ordered. Also includes matching fabric uphol-	Z62	\$8.90	\$167.00	\$175.90
stery. When optional center and rear seats are ordered. Also includes matching	Z62	9.45	177.00	186.45
tobric upholstery	Z 62	9.95	187.00	196.95
When bucket seats or custom deluxe front seat is ordered When optional center or rear seats are not ordered	700			
When optional center seat is ordered	Z62 Z62	6.80 6.80	127.00 127.00	133.80 133.80
When optional center and rear seat is ordered. Also includes color-keyed rear floor mat	Z62	7.85	147.00	154.85
Engines: POWER TEAMS	AND AXLES			
292 Six. CS-KS20 models with 3-speed, Chevrolet 4-speed or Turbo Hydra-matic transmission only. Includes 11° clutch. CS20 models also include 4.10 ratio rear axle when Chevrolet 4-speed or Turbo Hydra-matic transmission is	1			
ordered 350 V8. CE-KE20 models only. Includes 4-barrel carburetor and 12° coil clutch. Also includes 4.10 ratio rear axis, when Charrels 4-speed or	L25	4.80	90.00	94.80
1 urbo Hydra-matic transmission is ordered. 400 V8. CE20 models with 3-speed. Charrolet 4-speed or Turbo Hydra-matic.	LS9	2.25	42.00	44.25
transmission only Includes 4-harrel agreement duel antiques 2.54 and				
transmission only. Includes 4-barrel carburetor, dual exhausts, 3.54 ratio rear axle and 12° coil clutch. Liquid Petroleum Gas Conversion. C20 models only. Not available when automatic transmission, HD clutch, 307 or 400 engine is ordered. Includes	L47	8.80	165.00	173.80

[♦] State and local taxes not included.

C-K20 SERIES SUBURBAN CARRYALL

	ptica ımber	Factory D & H	List Price	Mir's Suggested Retail Delivered Price®
Transmissions:				
Powerglide. C20 models with standard engine only. Not available when 4.11 ratio rear axie is specified with 7.50–16 tires. Includes HD radiator. Turbo Hydra-matic. Includes HD radiator	м35	\$10.65	\$200.00	\$210.65
Without 400 engine Includes 4.10 ratio rear axle on CZU models when	1740	12.25	230.00	242,25
292 307 or 350 engine or K20 models with 350 engine is ordered	M49 M49	12.25	240.00	252.80
With 400 engine. Includes 3.54 ratio rear axle	M45			
Chevrolet 4-Speed C20 models only. Includes 4.10 ratio rear axle when 292, 307 or 350		6.15	115.00	121.15
engine is ordered	м20	8.15	113,00	121.15
K20 models only. Includes 4.10 ratio rear axle when 350 engine is ordered.	M20	5.60	105.00	110.60
New Process 435CR 4-Speed Close-Ratio. CE20 models with 350 engine only	M28	7.75	145.00	152.75
Axles, Rear: 4.10 Ratio. C20 models with Chevrolet 4-speed or Turbo Hydra-matic transmission and 250 engine; 3-speed, New Process 4-speed close-ratio or				
Powerglide transmission only. Not available when 400 engine is ordered 4.57 Ratio. C20 models only. Available only when Chevrolet 4-speed or	нв8	.65	12.00	12.65
Turbo Hydro-motic transmission with 292, 307 or 350 engine is ordered.	H20	.65	12.00 125.00	12.65 131.65
NoSPIN. Not available when 400 engine is ordered	G86 G87	6.65 6.65	125.00	131.65
Air Cleaner: Oil-bath. Capacity 1-quart. Available only on CS-KS20 models or CE20 models with 350 engine. Air Conditioning, Interior Roof-Mounted: V8 model only. Available only	K48	.55	10.00	10.55
Air Conditioning, Interior Roof-Mounted: V8 model only. Avoidable only when custom deluxe is ordered. Includes HD radiator and 42-amp generator.	C69	33.25	625.00	658.25
=	TTO O	2.40	45.00	47.40
Auxiliary. 53-amp-hr, 9-plate	TP2 T60	.90	16.00	16.90
Heavy-Duty; 80-amp-hr, 15-plate Belts, Seet: Installed for third passenger	100	1		
Front Seat Not available when bucket seats are ordered	AM3	.35 .35	6.50 6.50	6.85 6.85
Center Seat	A68 A68	.30	13.00	13.70
Center and Rear Seat. Bumpers: Chromed, tront and rear	V37	1.60	30.00	31.60
Cape, Hub: Chromed. C20 models only.	P03	.55	10.00	10.55
Cintal Hanvy-Buty: Digmeter 11', CS-KS20 models only, Included when		.35	6.50	6.85
Chevrolet 4-speed transmission or 292 engine is ordered	MOI		0.00	
Cooling: HD radiator only. Included when air conditioning or automatic transmission is ordered	VO1	1.35	25.00	26.35
		[
Garage.		68	12.00	126
Gauges: Ammeter, temperature and oil pressure	253 1116	.65 2.95	12.00 55.00	
Gauges: Ammeter, temperature and oil pressure	Z53 U16			57.9
Gauges: Ammeter, temperature and oil pressure. Tachometer, ammeter, temperature and oil pressure. Generators: Generators: Included when air conditioning is ordered.	U16 K79	2.95 1.20	55.00 22.00	57.95 23.20
Gauges: Ammeter, temperature and oil pressure. Tachometer, ammeter, temperature and oil pressure. Generators: Generators: 61-amp Delcotron.	U16 K79 K76	2.95 1.20 1.60	\$5.00 22.00 30.00	57.95 23.20 31.60
Gauges: Ammeter, temperature and oil pressure. Tachometer, ammeter, temperature and oil pressure. Generators: 42-amp Delcotron. Included when air conditioning is ordered. 61-amp Delcotron. Glass, Seit-Ray: All windows.	U16 K79 K76 A11	2.95 1.20 1.60 1.55	55.00 22.00 30.00 29.00	57.95 23.20 31.60 30.55
Gauges: Ammeter, temperature and oil pressure. Tachometer, ammeter, temperature and oil pressure. Generature: 42-amp Delcotron. Included when air conditioning is ordered. 61-amp Delcotron. Glass, Seit-Ray: All windows. Grands. Door Zime	U16 K79 K76 A11 B93	2.95 1.20 1.60 1.95 .45	\$5.00 22.00 30.00 29.00 8.00	57.95 23.20 31.60 30.55 8.45
Gauges: Ammeter, temperature and oil pressure. Tachometer, ammeter, temperature and oil pressure. Generature: Generature: 61-amp Delcotron. Glass, Seit-Ray: All windows. Guards, Door Edge. Hooks. Towins: Two, front. Not available with chromed bumpers.	U16 K79 K76 A11 B93	2.95 1.20 1.60 1.95 .45 1.00	22.00 30.00 29.00 8.00 18.00	57.95 23.20 31.60 30.55 8.45 19.00
Gauges: Anmeter, temperature and oil pressure. Tachometer, ammeter, temperature and oil pressure. Generators: 42-amp Delcotron. Included when air conditioning is ordered. 61-amp Delcotron. Glass, Seft-Ray: All windows. Guards, Door Edge. Hooks, Tewing: Two, front. Not available with chromed bumpers. Wake, Front Front Wheeling: K20 models only. Manual control at hubs.	U16 K79 K76 A11 B93 V76 F76	2.95 1.20 1.60 1.95 .45 1.00 3.90	\$5.00 22.00 30.00 29.00 8.00 18.00 73.00	57.95 23.20 31.60 30.55 8.45 19.00 76.90
Gauges: Anmeter, temperature and oil pressure. Tachometer, ammeter, temperature and oil pressure. Generators: 42-amp Delcotron. Included when air conditioning is ordered. 61-amp Delcotron. Glass, Seit-Ray: All windows. Guards, Door Edge. Hoeks, Tewing: Two, front. Not available with chromed bumpers. Hubs, Front Free-Wheeling: K20 models only. Manual control at hubs. Lawren: Roof Marker, Five.	U16 K79 K76 A11 B93 V76 F76 U01	2.95 1.20 1.60 1.95 .45 1.00 3.90 1.35	\$5.00 22.00 30.00 29.00 8.00 18.00 73.00 25.00	57.95 23.26 31.66 30.85 8.45 19.00 76.96
Gauges: Ammeter, temperature and oil pressure. Tachometer, ammeter, temperature and oil pressure. Generature: 42-amp Delcotron. Included when air conditioning is ordered. 61-amp Delcotron. Glass, Seit-Ray: All windows. Guards, Door Edge. Hooks, Tewisg: Two, front. Not available with chromed bumpers. Hubs, Front Free-Wheeling: K20 models only. Manual control at hubs. Lawren: Roof Marker. Five.	U16 K79 K76 A11 B93 V76 F76 U01	2.95 1.20 1.60 1.95 .45 1.00 3.90	\$5.00 22.00 30.00 29.00 8.00 18.00 73.00 25.00	57.95 23.20 31.60 30.55 8.45 19.00 76.90 26.35
Gauges: Ammeter, temperature and oil pressure. Tachometer, ammeter, temperature and oil pressure. Generature: 42-amp Delcotron. Included when air conditioning is ordered. 61-amp Delcotron. Glass, Seit-Ray: All windows. Guards, Does Edge. Hooks, Towing: Two, front. Not available with chromed humpers. Hube, Front Free-Wheeling: K20 models only. Manual control at hubs. Lemps: Roof Marker. Five. Lighter, Cigar: Included when custom deluxs is ordered.	U16 K79 K76 A11 B93 V76 F76 U01	2.95 1.20 1.60 1.95 .45 1.00 3.90 1.35	\$5.00 22.00 30.00 29.00 8.00 18.00 73.00 25.00	57.95 23.20 31.60 30.59 8.45 19.00 76.90 26.35
Gauges: Anmeter, temperature and oil pressure Tachometer, ammeter, temperature and oil pressure Generators: 42-amp Delcotron. Included when air conditioning is ordered 61-amp Delcotron. Glass, Seft-Ray: All windows. Guards, Door Edge Hooks, Towing: Two, front. Not available with chromed bumpers Hube, Front Free-Wheeling: K20 models only. Manual control at hubs Lamps: Roof Marker. Five Lighter, Cigar: Included when custom deluxs is ordered. Mirrors, Exterior: Replacing standard LH and RH mirrors	U16 K79 K76 A11 B93 V76 F76 U01 U37	2.95 1.20 1.60 1.95 .45 1.00 3.90 1.35	\$5.00 22.00 30.00 29.00 8.00 18.00 73.00 25.00	57.95 23.20 31.60 30.59 8.49 19.00 76.90 26.33 5.30
Gauges: Anmeter, temperature and oil pressure. Tachometer, ammeter, temperature and oil pressure. Generators: 42-amp Delcotron. Included when air conditioning is ordered. 61-amp Delcotron. Glass, Seti-Ray: All windows. Guards, Doer Edge. Heeks, Tewing: Two, front. Not available with chromed bumpers. Hube, Front Free-Wheeling: K20 models only. Manual control at hubs. Lamps: Roof Marker. Five. Lighter, Gigar: Included when custom deluxe is ordered. Mirrors, Exterior: Replacing standard LH and RH mirrors Below-Eye-Line type	U16 K79 K76 A11 B93 V76 F76 U01 U37	2.95 1.20 1.60 1.55 .45 1.00 3.90 1.35	\$5.00 22.00 30.00 29.00 8.00 18.00 23.00 25.00 5.00	57.95 23.20 31.60 30.55 8.45 19.00 76.90 26.35 5.30
Gauges: Ammeter, temperature and oil pressure. Tachometer, ammeter, temperature and oil pressure. Generators: 42-amp Delcotron. Included when air conditioning is ordered. 61-amp Delcotron. Glass, Seit-Ray: All windows. Guards, Door Edge. Hoeks, Tewisg: Two, front. Not available with chromed bumpers. Hubs, Front Free-Wheeling: K20 models only. Manual control at hubs. Lamps: Roof Marker. Five. Lighter, Cigar: Included when custom deluxs is ordered. Mirrors, Exterior: Replacing standard LH and RH mirrors Below-Eye-Line type 7.5" x 10.5" painted. 7.5" x 10.5" stainless steel.	U16 K79 K76 A11 B93 V76 F76 U01 U37	2.95 1.20 1.60 1.55 .45 1.00 3.90 1.35 .30	\$5.00 22.00 30.00 29.00 8.00 18.00 23.00 25.00 5.00	57.95 23.20 31.60 30.55 8.45 19.00 76.90 26.35 5.30 20.55 36.90
Gauges: Ammeter, temperature and oil pressure. Tachometer, ammeter, temperature and oil pressure. Generators: 42-amp Delcotron. Included when air conditioning is ordered. 61-amp Delcotron. Glass, Seft-Ray: All windows. Guards, Doer Edge. Hooks, Tewing: Two, front. Not available with chromed bumpers. Hubs, Front Free-Wheeling: K20 models only. Manual control at hubs. Lamps: Roof Marker. Five. Lighter, Cigar: Included when custom deluxe is ordered. Misroers, Exterior: Replacing standard LH and RH mirrors Below-Eye-Line type 7.5° x 10.5° painted. 7.5° x 10.5° stainless steel. Camper type Pointed	U16 K79 K76 A11 B93 V76 F76 U01 U37 D29 DG4	2.95 1.20 1.60 1.55 .45 1.00 3.90 1.35 .30 1.05 1.05	\$5.00 22.00 30.00 29.00 8.00 18.00 73.00 25.00 5.00 19.50 19.50	12.65 57.95 23.20 31.60 30.55 8.45 19.00 76.90 26.35 5.30 20.55 36.90
Gauges: Ammeter, temperature and oil pressure. Tachometer, ammeter, temperature and oil pressure. Generators: 42-amp Delcotron. Included when air conditioning is ordered. 61-amp Delcotron. Glass, Seti-Ray: All windows. Guards, Doer Edge. Hooks, Tewing: Two, front. Not available with chromed humpers. Hubs, Front Free-Wheeling: K20 models only. Manual control at hubs. Lamps: Roof Marker. Five. Lighter, Cigar: Included when custom deluxe is ordered. Mirrors, Exterior: Replacing standard LH and RH mirrors Below-Eye-Line type 7.5' x 10.5' painted. 7.5' x 10.5' stainless steel. Camper type Painted. Stainless steel.	U16 K79 K76 A11 B93 V76 F76 U01 U37 D29 DG4	2.95 1.20 1.60 1.55 .45 1.00 3.90 1.35 .30	\$5.00 22.00 30.00 29.00 8.00 18.00 73.00 25.00 5.00 19.50 19.50	57.95 23.26 31.66 30.53 8.45 19.00 76.96 26.33 5.36 20.53
Gauges: Ammeter, temperature and oil pressure. Tachometer, ammeter, temperature and oil pressure. Generators: 42-amp Delcotron. Included when air conditioning is ordered. 61-amp Delcotron. Glass, Seft-Ray: All windows. Guards, Doer Edge. Hooks, Tewing: Two, front. Not available with chromed bumpers. Hubs, Front Free-Wheeling: K20 models only. Manual control at hubs. Lamps: Roof Marker. Five. Lighter, Cigar: Included when custom deluxe is ordered. Misroers, Exterior: Replacing standard LH and RH mirrors Below-Eye-Line type 7.5° x 10.5° painted. 7.5° x 10.5° stainless steel. Camper type Pointed	U16 K79 K76 A11 B93 V76 F76 U01 U37 D29 DG4 DF1 DF2	2.95 1.20 1.60 1.55 .45 1.00 3.90 1.35 .30 1.05 1.05	\$5.00 22.00 30.00 29.00 8.00 18.00 25.00 5.00 19.50 35.00 19.50 49.00	57.95 23.26 31.66 30.55 8.45 19.00 76.99 26.35 5.36

[♦] State and local taxes not included.

C-K20 SERIES SUBURBAN CARRYALL

	Option fumber	Factory D & H	List Price	Mfr's Suggester Retail Delivered Price
Paints, Exterior: See Color and Trim chart				··
Solid color		N.C.	N.C.	N.C.
Conventional Two-tone. With white secondary color		\$ 2.15	\$ 40.00	\$ 42.15
Special Two-tone. With white upper and lower secondary colors. Available only when custom lower moldings are ordered		3.20	60.00	63.20
Radios: Pushbutton control. Includes manual front antenna				
AM	. U63	3.50	65.00	68.50
AM/FM	. U69	7.55	141.00	148.55
Seats, Front: See exterior and interior color chart. Custom Deluxe Vinyl, Full-Width. Includes front seat area carpeting. Available in parchment trim only	1	•		
When optional rear seats are not ordered	A52	3.65	68.00	71.65
When center seat is ordered. Also includes center seat area carpeting.	A52	6.30	118.00	124.30
When center and rear seats are ordered. Also includes center seat	. I	0.00	110.00	141.00
Bucket, Driver and Passenger. Includes front seat area carpeting and center console. Available in parchment trim only	A52	8.45	158.00	166.45
When optional rear seats are not ordered	A50	6.55	123.00	120 55
When center seat is ordered. Also includes center seat area carpeting	A50	9.25	173.00	129.55 182.25
When center and rear seats are ordered. Also includes center seat		5.25	113.00	102,23
area carpeting	A50	11.35	213.00	224.35
Seats, Rear: Seat trim always matches the front seats whether standard or optional. The price of matching seat trim is included when custom deluxe or optional front seats are ordered. Includes RH coat hook.				
Center Seat. Includes HD front and rear springs on C20 models only,				
Center and Rear Seat. Includes HD front and rear engines on C20 models	AS3	6.00	112.00	118.00
only, LH and RH armrests and seat belts	A80	11.50	216.00	227.50
Shock Absorbers:	{		, ,	
Front and Rear. Heavy-duty	FS1	.80	15.00	15.80
Rear. Heavy-duty	GER	.45	8.00	8.45
Superlift Rear. C20 models only	G66	2.40	45.00	47.40
Springs, Heavy-Daty:		2,10	45.00	42.40
Front				
Capacity 1750-lb each. C20 models only. Included when center or rear				
sedi is ordered	F60	.35	6.00	6.35
Capacity 1750-lb each. K20 models only	F60	1.65	31.00	32.65
Hear ended to the second se	ļ		01.00	52. 00
Capacity 3000-lb each. C20 models with HD front springs only. Included	_ [
when center or rear seat is ordered.		1.00	18.00	19.00
Capacity 2500-lb each. K20 models only	G50	1.00	18.00	19.00 [~]
Auxiliary Rear. Capacity 500-lb each. C20 models only		1.55	29.00	30.55
Stubilizer, Front: C20 models only	F59	1.00	18.00	19.00
Iteering, Power:				55155
C20 models only	N40	6.65	125.00	121.66
K20 models only.	N40	7.45	140.00	131.65
Iteering Wheel, Comfortilt: Available only when optional transmission is		4,72	440.00	147.45
ordered	N33	2.95	55.00	63 AB
witches, Dome Lamp: Front doors. Included when custom deluxe is		2.50	55.00	57.95
ordered	C80	25	4.00	4.00
Fhrottle Control: Manual		.25	4.00	4.25
	K31	.75	14.00	14.75
Fires: See following page				

State and local taxes not included.

C-K20 SERIES SUBURBAN CARRYALL

WIDE BASE TUBELESS TIRES (Factory installed)

Note: Front and rear tires must K20 models require use of rear wheels.	nd Type be of the same rim width. same tread type on front and	Rim Width Included In Tire Option	Option Number	Factory D&H	List Price	Mir's Suggests Retail Delivered Price⊕
8.75-16.5/C (SPR) Maximu: — Highway Nylon — On-Off Road Nylon	(4) Front & Rear (1) Spare (2) Front; K20 only (2) Rear (1) Spare	. 6.00 . 6.00 . 6.00	Rear (1990) Std RP5 RP2 RP2 RP2 RP2	N.C. \$ 6.00 1.35 1.35 7.05	N.C. \$66.00 21.00 21.00 84.00	N.C. \$72.00 22.35 22.35 91.05
—Highway Nylon	m Tire Capacity (Each)—F (2) Front (2) Rear (1) Spare (4) Front & Rear; K20 only (2) Rear (1) Spare	. 6,00 . 6,00 . 6,00 . 6,00 . 6,00	Rear (2350) RP6 RP6 RP6 RQ4 RQ4 RQ4	1.20 1.20 6.50 4.80 2.40 7.10	19.00 19.00 74.00 80.00 40.00 84.00	20.20 20.20 80.50 84.80 42.40 91.10
—Highway Nylon	(4) Front & Rear (2) Front (1) Spare (2) Rear; (20) Conly (2) Rear; (20) Conly (2) Rear; (20) Conly (1) Spare	6.75 6.75 6.75 6.75 6.75	Rear (2780) RP9 RP9 RP9 RQ5 RQ5 RQ5 RQ5	6.95 3.40 7.50 8.95 4.55 8.00	99.00 48.00 87.00 141.00 72.00 97.00	105.95 51.40 94.50 149.95 76.55 105.00
						<u> </u>
		· · · ·				

[♦] State and local taxes not included.